
# - SITE PLAN - 40 EDISON STREET ASSESSORS MAP 107 LOTS 105 & 109 NEW BEDFORD, MA

<ul><li>ZONING DATA</li></ul>	_					
DISTRICT: INDUSTRIAL B (IB)						
<u>DESCRIPTION</u> <u>REQUIRED</u>	EXISTING	<u>PROPOSED</u>				
LOT AREA 0 S.F.	185,792 S.F.	185,792 S.F.				
LOT FRONTAGE 0 FT	487,40 FT	487,40 FT				
FRONT SETBACK 25 FT	3.4 FT	3,4 FT				
SIDE SETBACK 25 FT	9.10 FT	9.1 FT				
REAR SETBACK 25 FT	O FT	0 FT				
BUILDING HEIGHT (MAXIMUM) 100 FT	26 FT±	26 FT±				
BUILDING COVERAGE (MAXIMUM) 50 %	67,8 %	61.8 %				
GREEN SPACE 20 %	6.4 %	21.0 %				
<ul><li>– PARKING REQUIREMENT –</li></ul>						
PRINCIPAL USE: SELF STORAGE FACILITY						
REQUIREMENT	<u>REQURIED</u>	PROVIDED				
1 SPACE PER 1,500 SF OF GROSS FLOOR AREA UP TO 15,000 SF. THEREAFTER, ONE (1) ADDITIONAL SPACE FOR EACH 5,000 SF OR PORTION THEREOF IN EXCESS OF 15,000 SF, PLUS ONE (1) SPACE FOR EACH VEHICLE UTILIZED IN BUSINESS.	30 SPACES	35 SPACES				

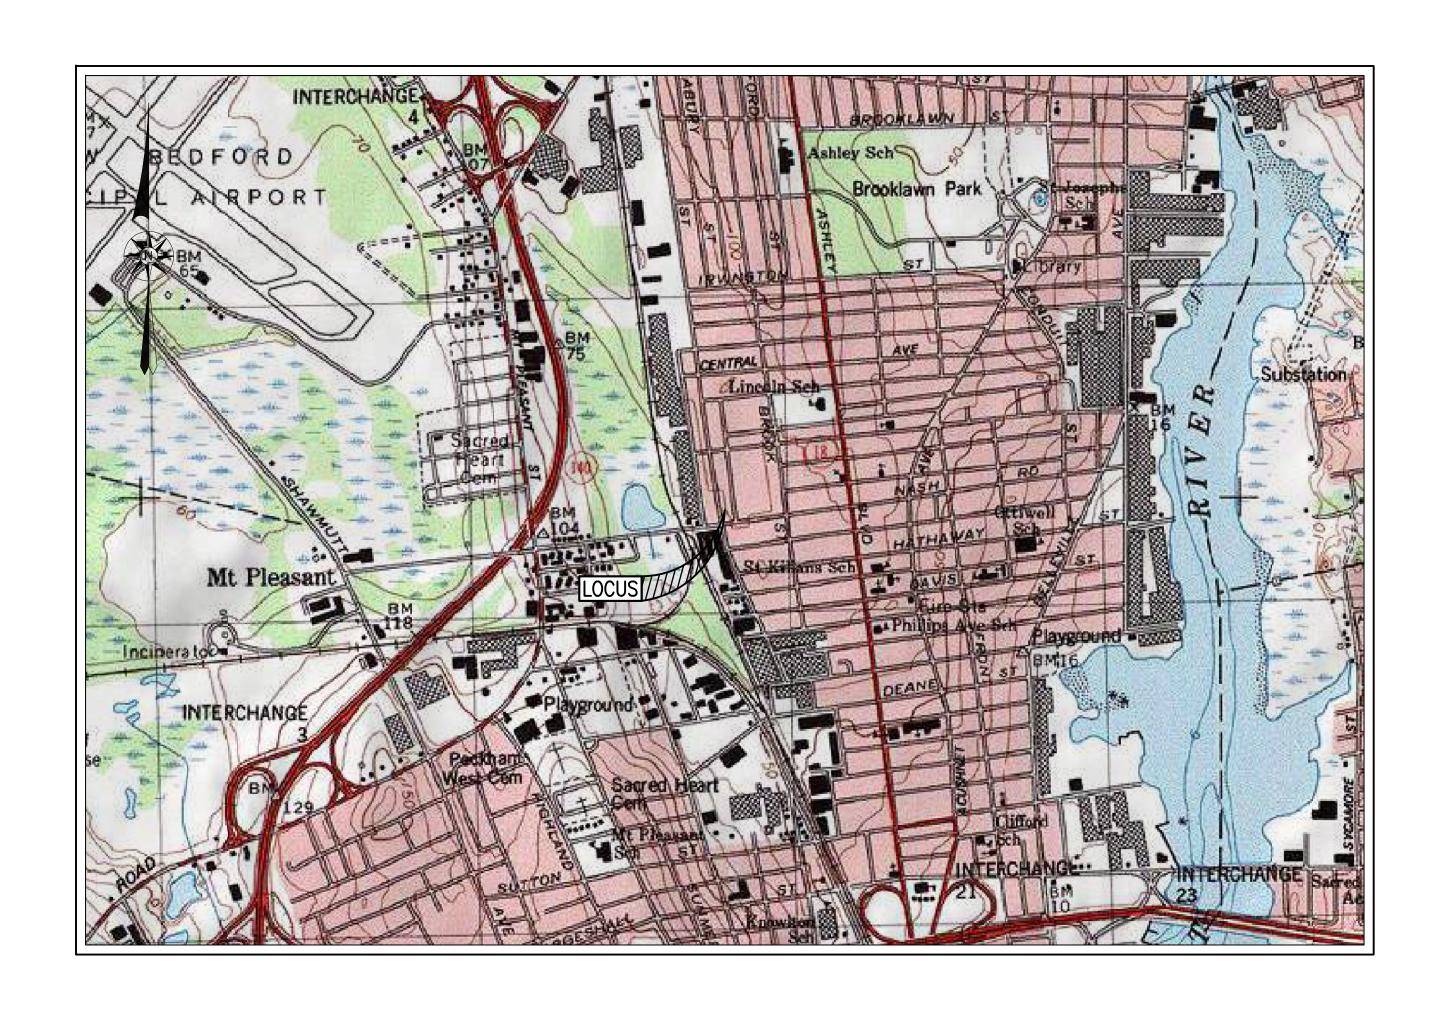

——AREA MAP——
SCALE: 1"=1,000'±

- IN D E X -

# SHEET DESCRIPTION

\_\_\_\_\_\_

1 COVER

NOTES & LEGEND

3 EXISTING CONDITIONS

4 DEMOLITION

5 LAYOUT

6 GRADING & UTILITIES

7 LANDSCAPING

8 & 9 DETAILS

THE STEAM OF THE STATE OF THE S



## www.FarlandCorp.com

DARTMOUTH, MA 0274

• ENGINEERING

• LAND SURVEYING

DEVELOPMENT

DRAWN BY: SC
DESIGNED BY: SC

CHECKED BY: CAF

SITE PLAN
40 EDISON STREET
MAP 107 LOTS 105 &
EDFORD, MASSACHUSETTS

ASSESS NEW PREPARED DDCA 7

JUNE 24, 2021

SCALE: AS NOTED

JOB NO. 21-253

LATEST REVISION: SEPTEMBER 3, 2021

COVER SHEET

SHEET 1 OF 9

COPYRIGHT © 2021 FARLAND CORP. ALL RIGHTS RESERVED

NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED IN ANY FORM OR BY ANY M

MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE, WITHOUT THE EXPRESS WRITTEN CONSENT OF FARLAND CORP.

ANY MODIFICATIONS MADE TO THIS DOCUMENT WITHOUT THE WRITTEN PERMISSION OF FARLAND CORP. SHALL RENDER IT INVALID AND

RECORD OWNER:
ASSESSORS MAP 107 LOTS 105 & 109
EDISON VILLAGE LLC
352 FAUNCE CORNER ROAD
DARTMOUTH, MA 02747
DEED BOOK 12492 PAGE 266
PLAN BOOK 183 PAGE 27

## **GENERAL CONSTRUCTION NOTES**

- 1. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR ELEVATION OF EXISTING UTILITIES AND STRUCTURES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF VARIOUS UTILITY COMPANIES AND WHERE POSSIBLE, MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE LOCATION OF ALL UNDERGROUND UTILITIES AND STRUCTURES SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO THE START OF CONSTRUCTION. THE CONTRACTOR MUST CONTACT THE APPROPRIATE UTILITY COMPANY, ANY GOVERNING PERMITTING AUTHORITY, AND "DIG SAFE" AT LEAST 72 HOURS PRIOR TO ANY EXCAVATION WORK TO REQUEST EXACT FIELD LOCATION OF UTILITIES INTERFERING WITH THE PROPOSED CONSTRUCTION AND APPROPRIATE REMEDIAL ACTION TAKEN BEFORE PROCEEDING WITH THE WORK. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH
- THE PROPOSED IMPROVEMENTS SHOWN ON THE PLAN. TOPOGRAPHIC AND PROPERTY LINE SURVEY PERFORMED BY FARLAND CORP. IN MAY OF 2021.
- VERTICAL ELEVATIONS REFER TO THE NORTH AMERICAN VERTICAL DATUM (NAVD) OF 1988 AND HORIZONTAL LOCATIONS REFER TO THE NORTH AMERICAN DATUM (NAD) OF 1983.
- ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH ALL APPLICABLE STATE AND LOCAL STANDARDS AND
- 5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ESTABLISHING AND MAINTAINING ALL CONTROL POINTS AND BENCH MARKS NECESSARY FOR THE WORK.
- 6. ALL BENCHMARKS SHOWN ON THIS PLAN ARE TO BE CHECKED FOR CONSISTENCY BY THE CONTRACTOR. ANY
- DISCREPANCIES MUST BE RESOLVED BY THIS OFFICE PRIOR TO CONSTRUCTION. 7. WHERE PROPOSED PAVEMENT AND WALKS ARE TO MEET EXISTING, THE CONTRACTOR SHALL SAWCUT A NEAT LINE
- AND MATCH GRADE. SEAL ALL JOINTS WITH HOT BITUMINOUS ASPHALT JOINT SEALER. CURBING TO BE AS INDICATED ON THE PLANS.
- 9. ALL EXISTING TREES, SHRUBS AND GROUND COVER WHERE NATURAL GRADE IS TO BE RETAINED SHALL BE KEPT IN THEIR EXISTING STATE UNLESS REMOVAL IS REQUIRED FOR CONSTRUCTION PURPOSES. 10. ALL AREAS DISTURBED BY CONSTRUCTION AND NOT TO BE PAVED OR OTHERWISE TREATED AS NOTED ON PLAN
- SHALL BE TREATED WITH 4" OF LOAM, SEEDED AND HAY MULCHED FOR EROSION CONTROL 11. SITE IMPROVEMENTS SHALL CONFORM TO A.D.A. SPECIFICATIONS.
- 12. LIGHTING SHALL BE DIRECTED ON SITE AND AWAY FROM TRAFFIC INTERFERENCE
- 13. THE CONTRACTOR SHALL PROTECT AND/OR CAP OFF ALL EXISTING ON-SITE UTILITY SERVICES ACCORDING TO THE LOCAL AUTHORITY'S SPECIFICATIONS. SERVICES SHALL BE CAPPED OFF WHERE SAME ENTER THE PERIMETER OF THE PROPERTY LINE.
- 14. CONTRACTOR SHALL THOROUGHLY FAMILIARIZE THEMSELVES WITH ALL CONSTRUCTION DOCUMENTS, SPECIFICATIONS AND SITE CONDITIONS PRIOR TO BIDDING AND PRIOR TO CONSTRUCTION.
- 15. ANY DISCREPANCIES BETWEEN DRAWINGS, SPECIFICATIONS AND SITE CONDITIONS SHALL BE REPORTED IMMEDIATELY TO THE OWNER'S REPRESENTATIVE FOR CLARIFICATION AND RESOLUTION PRIOR TO BIDDING OR CONSTRUCTION.
- 16. THESE PLANS ARE PERMITTING PLANS AND SHALL NOT TO BE USED FOR CONSTRUCTION. A FINAL SET OF STAMPED PLANS FOR CONSTRUCTION WILL BE ISSUED AFTER RECEIVING FINAL APPROVAL FROM THE LOCAL AND/OR STATE DEPARTMENTS.

## CONSTRUCTION SEQUENCING NOTES

- CONSTRUCT TEMPORARY AND PERMANENT EROSION CONTROL FACILITIES. EROSION CONTROL FACILITIES SHALL BE INSTALLED PRIOR TO ANY EARTH MOVING.
- 2. TREE PROTECTION FENCE SHALL BE INSTALLED AND APPROVED BY THE OWNER REPRESENTATIVE PRIOR TO ANY
- CLEAR CUT, DEMOLISH AND DISPOSE OF EXISTING SITE ELEMENTS NOT TO REMAIN.
- GRADE AND GRAVEL ALL PAVED AREAS. ALL PROPOSED PAVED AREAS SHALL BE STABILIZED IMMEDIATELY AFTER
- 5. BEGIN ALL PERMANENT AND TEMPORARY SEEDING AND MULCHING. ALL CUT AND FILL SLOPES SHALL BE SEEDED AND MULCHED IMMEDIATELY AFTER THEIR CONSTRUCTION
- 6. DAILY, OR AS REQUIRED, CONSTRUCT TEMPORARY BERMS, DRAINS, DITCHES, SILT FENCES AND MULCH AND SEED AS REQUIRED.
- FINISH PAVING ALL HARD SURFACE AREAS.
- INSPECT AND MAINTAIN ALL EROSION AND SEDIMENT CONTROL MEASURES. COMPLETE PERMANENT SEEDING AND LANDSCAPING.
- 10. REMOVE TEMPORARY EROSION CONTROL MEASURES
- 11. THE CONSTRUCTION SEQUENCE SHALL BE CONFINED TO THE LIMIT OF WORK AS SHOWN ON THE DRAWINGS
- 12. UPON COMPLETION OF CONSTRUCTION THE OWNER SHALL AGREE TO MAINTAIN AND CLEAN ALL DRAINAGE STRUCTURES AS REQUIRED.

# SITE PREPARATION NOTES

- WITHIN THE LIMIT OF WORK LINE AS NOTED ON THE SITE PLANS, REMOVE AND DISCARD ALL CONCRETE PAVEMENT, BITUMINOUS CONCRETE PAVEMENT, BRICK PAVEMENT, TOP SOIL, MULCH, TRASH, DEAD TREES AND STUMPS, SHRUBBERY, CHAIN LINK FENCE POSTS, RAILS, FABRIC, GATES, FOOTINGS AND ALL APPURTENANCES, BOLLARDS, POSTS, CONCRETE FOOTINGS AND FOUNDATIONS, WALLS AND CURBS UNLESS OTHERWISE NOTED.
- 2. THE OWNER'S REPRESENTATIVE SHALL BE CONSULTED AND WILL REVIEW THE WORK ON SITE WITH THE CONTRACTOR BEFORE ANY WORK SHALL COMMENCE.
- THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS IN THE FIELD AND REPORT ANY DISCREPANCIES BETWEEN PLANS AND ACTUAL CONDITIONS TO THE OWNER'S REPRESENTATIVE PRIOR TO STARTING WORK.
- 4. THE CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE TO EXISTING CONDITIONS TO REMAIN THAT ARE DUE TO CONTRACTOR OPERATIONS. 5. ALL ITEMS TO BE REMOVED THAT ARE NOT STOCKPILED FOR LATER REUSE ON THE PROJECT OR DELIVERED TO
- THE OWNER SHALL BE LEGALLY DISPOSED OF OFF SITE BY THE CONTRACTOR.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING HIS EFFORTS OF THE DEMOLITION WITH ALL TRADES.
- THE CONTRACTOR SHALL COORDINATE ALL ADJUSTMENT OR ABANDONMENT OF UTILITIES WITH THE RESPECTIVE UTILITY COMPANY.
- 8. THE CONTRACTOR SHALL MAINTAIN OR ADJUST TO NEW FINISH GRADES AS NECESSARY ALL UTILITY AND SITE STRUCTURES SUCH AS LIGHT POLES, SIGN POLES, MANHOLES, CATCH BASINS, HAND HOLES, WATER AND GAS GATES, HYDRANTS, ETC., FROM MAINTAINED UTILITY AND SITE SYSTEMS UNLESS OTHERWISE NOTED OR DIRECTED BY THE OWNER'S REPRESENTATIVE.

# UTILITY AND GRADING NOTES

- 1. A MINIMUM OF 18" VERTICAL CLEARANCE SHALL BE MAINTAINED WHERE WATER SERVICES CROSS STORM DRAIN
- ALL SERVICE CONNECTIONS SHALL BE INSTALLED TO A POINT OF 10 FEET FROM THE BUILDING WALL UNLESS
- OTHERWISE NOTED OR DETAILED. ALL WATER MAINS SHALL BE INSTALLED WITH A MINIMUM OF 5 FEET OF COVER AND A MAXIMUM OF 6 FEET OF
- COVER EXCEPT AS NOTED OR DETAILED OTHERWISE. GREATER DEPTHS ARE PERMITTED WHERE REQUIRED TO AVOID CONFLICTS WITH OTHER UTILITIES.
- GENERALLY, WATER MAIN FITTINGS IDENTIFIED ON THIS DRAWING ARE SHOWN FOR INSTALLATION LOCATION PURPOSE. THE CONTRACTOR SHALL NOTE THAT NOT ALL FITTINGS ARE NOTED, SHOWN OR INDICATED.
- ALL WATER MAIN FITTINGS, TEES, BENDS, HYDRANTS, ETC. SHALL BE RESTRAINED WITH CONCRETE THRUST BLOCKS. DOMESTIC WATER SERVICES 2.5" AND SMALLER SHALL BE TYPE K COPPER TUBING AND SHALL BE INSTALLED WITH APPROPRIATELY SIZED CORPORATION STOP AND APPROVED SADDLE CURB STOP, AND BOX, USING MATERIALS SPECIFIED BY THE MUNICIPAL WATER DEPARTMENT OR COMPANY.
- ALL WATER MAINS 3" AND LARGER SHALL BE CEMENT LINED DUCTILE IRON CLASS 52, AND SHALL BE INSTALLED WITH APPROPRIATELY SIZED FITTINGS AND GATE VALVES.
- ALL WATER MAIN APPURTENANCES, MATERIALS, METHODS OF INSTALLATION AND TESTING REQUIREMENTS SHALL
- MEET OR EXCEED ALL LOCAL MUNICIPAL REQUIREMENTS. PRESSURE AND LEAKAGE TEST, DISINFECTION AND FLUSHING SHALL BE IN ACCORDANCE WITH ALL LOCAL
- MUNICIPAL STANDARDS AND REQUIREMENTS. CONTRACTORS SHALL BE RESPONSIBLE FOR ALL COSTS IN CONNECTION WITH UTILITY TESTS, FLUSHING AND INSPECTIONS AS REQUIRED BY THE LOCAL MUNICIPALITY.
- 10. PRIMARY WATER METER AND BACKFLOW PREVENTER SHALL BE LOCATED AT THE POINT WHERE THE WATER LINE ENTERS THE BUILDING UNLESS OTHERWISE NOTED OR DETAILED ON THE DRAWINGS.
- 11. ALL GRAVITY SEWER PIPE SHALL BE PVC PER ASTM D3034, SDR-35 AND ASTM D1784 WITH RUBBER GASKET WHERE SANITARY SEWERS CROSS WATER LINES, THE SEWER SHALL BE LAID AT SUCH AN ELEVATION THAT THE
- CROWN OF THE SEWER IS AT LEAST EIGHTEEN INCHES BELOW THE INVERT OF THE WATER MAIN. IF THE ELEVATION OF THE SEWER CANNOT BE VARIED TO MEET THIS REQUIREMENT. THE WATER MAIN SHALL BE RELOCATED TO PROVIDE THIS SEPARATION OR CONSTRUCTED WITH MECHANICAL JOINT PIPE FOR A DISTANCE OF TEN FEET ON EACH SIDE OF THE SEWER. ONE FULL LENGTH OF WATER MAIN SHALL BE CENTERED OVER THE SEWER SO THAT BOTH JOINTS WILL BE AS FAR AS THE SEWER AS POSSIBLE. IF MECHANICAL JOINT PIPE IS NOT USED THAN BOTH THE WATER MAIN AND SANITARY SEWER SHALL BE ENCASED IN CONCRETE FOR A MINIMUM DISTANCE OF 10 FEET FROM THE CROSSING POINT OF THE OTHER PIPE AS MEASURED NORMALLY FROM ALL POINTS ALONG THE PIPE.
- 13. DUE TO THE SMALL SCALE OF THE SITE WORK DRAWINGS, EXACT LOCATION OF UTILITY STUBS FOR BUILDING CONNECTIONS SHALL BE VERIFIED WITH THE BUILDING DRAWINGS. SERVICE STUBS TO THE BUILDING SHALL BE INSTALLED TO A POINT 10 FEET FROM THE BUILDING WALL UNLESS OTHERWISE NOTED OR DETAILED.
- WHERE PROPOSED GRADES MEET EXISTING GRADES. CONTRACTOR SHALL BLEND GRADES TO PROVIDE A SMOOTH TRANSITION BETWEEN EXISTING AND NEW WORK. PONDING AT TRANSITION AREAS WILL NOT BE ALLOWED. CONTRACTOR SHALL MAINTAIN POSITIVE DRAINAGE AWAY FROM ALL BUILDING FOUNDATIONS AND STRUCTURES.
- MAXIMUM SLOPE IN DISTURBED AREAS SHALL NOT EXCEED 3:1, UNLESS OTHERWISE NOTED.
- CONTRACTOR SHALL VERIFY EXISTING GRADES AND NOTIFY OWNER'S REPRESENTATIVE OF ANY DISCREPANCIES. 18. CONTRACTOR SHALL ADJUST UTILITY ELEMENT MEANT TO BE FLUSH WITH GRADE THAT IS AFFECTED BY SITE WORK
- OR GRADE CHANGES, WHETHER SPECIFICALLY NOTED ON PLANS OR NOT. 19. WHERE AN EXISTING UTILITY IS FOUND TO CONFLICT WITH THE PROPOSED WORK, THE LOCATION, ELEVATION AND
- SIZE OF THE UTILITY SHALL BE ACCURATELY DETERMINED WITHOUT DELAY BY THE CONTRACTOR, AND THE INFORMATION FURNISHED TO THE OWNER'S REPRESENTATIVE FOR RESOLUTION OF THE CONFLICT. 20. THE CONTRACTOR SHALL MAKE ALL ARRANGEMENTS FOR THE ALTERATION AND ADJUSTMENT OF ALL GAS, ELECTRIC,
- TELEPHONE AND ANY OTHER PRIVATE UTILITIES BY THE UTILITY COMPANIES. 21. THE LOCATION, SIZE, DEPTH AND SPECIFICATIONS FOR CONSTRUCTION OF PRIVATE UTILITY SERVICES SHALL BE INSTALLED ACCORDING TO THE REQUIREMENTS PROVIDED BY AND APPROVED BY THE RESPECTIVE UTILITY COMPANY (GAS, TELEPHONE AND ELECTRICAL). FINAL DESIGN AND LOCATIONS AT THE BUILDING WILL BE PROVIDED BY THE ARCHITECT. THE CONTRACTOR SHALL COORDINATE THE INSTALLATION OF THE UTILITY CONNECTIONS WITH THE
- 22. ANY EXISTING WATER AND/OR SEWER SERVICES TO BE ABANDONED OR OLD UNUSED SERVICES PERTAINING TO THE PARCEL ARE TO BE CAPPED IN ACCORDANCE WITH THE CITY'S CONSTRUCTION STANDARDS. WATER SERVICES ARE TO BE CAPPED AT THE MAIN. SEWER SERVICES ARE TO BE CAPPED AT THE PROPERTY LINE.

## LAYOUT AND MATERIAL NOTES

- 1. CONTRACTOR SHALL THOROUGHLY FAMILIARIZE THEMSELVES WITH ALL CONSTRUCTION DOCUMENTS, SPECIFICATIONS AND SITE CONDITIONS PRIOR TO BIDDING AND PRIOR TO CONSTRUCTION.
- ANY DISCREPANCIES BETWEEN DRAWINGS, SPECIFICATIONS AND SITE CONDITIONS SHALL BE REPORTED IMMEDIATELY
- TO THE OWNER'S REPRESENTATTIVE FOR CLARIFICATION AND RESOLUTION PRIOR TO BIDDING OR CONSTRUCTION. SEE ARCHITECTURAL DRAWINGS FOR EXACT BUILDING DIMENSIONS AND ALL DETAILS CONTIGUOUS TO THE BUILDING INCLUDING SIDEWALKS, RAMPS, UTILITY ENTRANCE LOCATIONS, WALL PACKS, CONCRETE DOOR PADS, ROOF DRAINS,
- ACCESSIBLE CURB RAMPS SHALL BE PER THE MASSACHUSETTS ARCHITECTURAL ACCESS BOARD AND THE
- AMERICANS WITH DISABILITIES ACT ACCESSIBLITY GUIDELINES, WHICHER IS MORE STRINGENT.
- THE FOLLOWING LAYOUT CRITERIA SHALL CONTROL UNLESS OTHERWISE NOTED ON THE PLAN:
- ALL DIMENSIONS ARE TO OUTSIDE FACE OF BUILDING. ALL DIMENSIONS ARE TO FACE OF CURB AT GUTTER LINE.

RESPECTIVE COMPANIES PRIOR TO ANY UTILITY CONSTRUCTION.

- ALL DIMENSIONS ARE TO CENTER OF PAVEMENT MARKINGS.
- ALL TIES TO PROPERTY LINES ARE PERPENDICULAR TO THE PROPERTY LINE UNLESS OTHERWISE NOTED.

## <u>EROSION AND SEDIMENT CONTROL NOTES</u>


- 1. A COPY OF THE SOIL EROSION AND SEDIMENT CONTROL PLAN MUST BE MAINTAINED ON THE PROJECT SITE DURING CONSTRUCTION. 1. SOIL EROSION AND SEDIMENT CONTROL PRACTICES IN THE PLAN SHALL BE CONSTRUCTED IN ACCORDANCE WITH
- THE PLANS AND SPECIFICATIONS. 2. ALL APPLICABLE SOIL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE IN PLACE PRIOR TO ANY DEMOLITION
- GRADING OPERATIONS AND/OR INSTALLATION OF PROPOSED STRUCTURES OR UTILITIES. 3. ALL APPLICABLE SOIL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE LEFT IN PLACE UNTIL CONSTRUCTION
- IS COMPLETED AND/OR THE AREA IS STABILIZED. 4. ALL SOIL EROSION AND SEDIMENT CONTROL STRUCTURES SHALL BE INSPECTED AND MAINTAINED ON A REGULAR
- BASIS AND AFTER EVERY STORM EVENT. 5. THE MAINTENANCE OF SOIL EROSION AND SEDIMENT CONTROL MEASURES AND FACILITIES DURING AND IMMEDIATELY AFTER CONSTRUCTION RESTS WITH THE GENERAL CONTRACTOR. UPON ACCEPTANCE OF THE PROJECT, THE OWNER SHALL BECOME RESPONSIBLE FOR MAINTENANCE OF ANY REMAINING MEASURES AND FACILITIES.

6. OFF SITE SEDIMENT DISTURBANCE MAY REQUIRE ADDITIONAL CONTROL MEASURES TO BE DETERMINED BY THE

- ENGINEER. ADDITIONAL SOIL EROSION MEASURES MAY BE REQUIRED TO BE INSTALLED, AS DIRECTED BY THE DISTRICT INSPECTOR.
- 8. ADJOINING PROPERTIES SHALL BE PROTECTED FROM EXCAVATION AND FILLING OPERATIONS AT ALL TIMES. 9. THE CONTRACTOR SHALL UTILIZE ALL METHODS NECESSARY TO PREVENT BLOWING AND MOVEMENT OF DUST FROM
- THE EXPOSED SOIL SURFACES.
- 10. PAVED ROADWAYS MUST BE KEPT CLEAN AT ALL TIMES. 11. A CRUSHED STONE TIRE CLEANING PAD WILL BE INSTALLED WHEREVER A CONSTRUCTION ENTRANCE EXISTS.
- 12. ALL CATCH BASIN INLETS SHALL BE PROTECTED DURING CONSTRUCTION.
- 13. ALL STORM DRAINAGE OUTLETS SHALL BE PROTECTED AS REQUIRED HEREON BEFORE DISCHARGE POINTS BECOME OPERATIONAL.
- 14. THE SITE SHALL AT ALL TIMES BE GRADED AND MAINTAINED SUCH THAT ALL STORMWATER RUNOFF IS DIVERTED TO SOIL EROSION AND SEDIMENT CONTROL FACILITIES.
- 15. LAND AREAS EXPOSED AT ANY ONE TIME AND THE LENGTH OF EXPOSURE SHALL BE KEPT TO A PRACTICAL MINIMUM. THEY SHALL BE LEFT IN A NEAT AND FINISHED APPEARANCE AND PROTECTED FROM EROSION. 16. ANY DISTURBED AREA THAT WILL BE LEFT EXPOSED FOR MORE THAN SIXTY (60) DAYS AND NOT SUBJECT TO CONSTRUCTION TRAFFIC SHALL IMMEDIATELY RECEIVE A TEMPORARY SEEDING AND FERTILIZATION. IF THE SEASON
- PROHIBITS TEMPORARY SEEDING, THE DISTRIBUTED AREAS SHALL BE MULCHED. 17. ALL CRITICAL AREAS SUBJECT TO EROSION SHALL RECEIVE A TEMPORARY SEEDING AND BE MULCHED IN ACCORDANCE WITH THE SPECIFICATIONS IMMEDIATELY FOLLOWING ROUGH GRADING.
- 18. IMMEDIATELY AFTER COMPLETION OF STRIPPING AND STOCKPILING OF TOPSOIL, SEED THE STOCKPILE WITH ANNUAL RYE GRASS. STABILIZE TOPSOIL STOCKPILES WITH STRAW MULCH FOR PROTECTION IF THE SEASON DOES NOT PERMIT THE APPLICATION AND ESTABLISHMENT OF TEMPORARY SEEDING.
- 19. SOIL STOCKPILES ARE NOT TO BE LOCATED WITHIN FIFTY (50) FEET OF WETLANDS, THE FLOODPLAIN, SLOPE, ROADWAY OR DRAINAGE FACILITIES. THE BASE OF ALL STOCKPILES SHALL BE PROTECTED BY A HAY BALE BARRIER OR SEDIMENT FENCE. LOCATIONS ARE DELINEATED ON THE PLAN. 20. MAXIMUM SIDE SLOPES OF ALL EXPOSED SURFACES SHALL NOT BE CONSTRUCTED STEEPER THAN 3:1 UNLESS
- OTHERWISE APPROVED BY THE DISTRICT. 21. ALL AREAS NOT STABILIZED BY CONSTRUCTION, SODDING OR LANDSCAPING SHALL BE SEEDED AND STABILIZED IN
- ACCORDANCE WITH THE SEEDING AND MULCHING SPECIFICATIONS. 22. MULCHING IS REQUIRED ON ALL SEEDED AREAS TO INSURE AGAINST EROSION BEFORE GRASS IS ESTABLISHED TO PROMOTE EARLIER VEGETATIVE COVER.
- 23. ALL DEWATERING OPERATIONS MUST DISCHARGE DIRECTLY INTO A SEDIMENT FILTRATION DEVICE. THE SEDIMENT FILTER MUST BE CAPABLE OF FILTERING THE SEDIMENT AND BE PLACED SO AS NOT TO CAUSE EROSION OF THE DOWNSTREAM AREA.

## GENERAL PLANTING NOTES

- ALL PLANT MATERIAL SHALL CONFORM TO THE STANDARDS OF THE AMERICAN ASSOCIATION OF NURSERYMEN OR THE PLANT MATERIAL WILL BE UNACCEPTABLE. ALL PLANT MATERIAL SHALL BE TRUE TO SPECIES, VARIETY, SIZE AND BE CERTIFIED DISEASE AND INSECT FREE. THE OWNER AND/OR THE LANDSCAPE ARCHITECT RESERVES THE RIGHT TO APPROVE ALL PLANT MATERIAL ON SITE PRIOR TO INSTALLATION.
- 2. ALL PLANT MATERIAL SHALL BE PROPERLY GUYED, STAKED, WRAPPED, AND PLANTED IN CONFORMANCE WITH THE TYPICAL PLANTING DETAILS. GUY WIRES SHALL BE ATTACHED TO THE TREE AT A HEIGHT OF TWO-THIRDS THE HEIGHT OF THE TREE AND SHOULD BE LOCATED AT POINTS SO AS NOT TO SPLIT THE TRUNK OF MULTI-STEMMED TREES. PROVIDE THREE STAKES PER TREE UNLESS NOTED OTHERWISE INSTALL ALL PLANT MATERIAL ON UNDISTURBED GRADE. PROVIDE BURLAP WRAPPING WITH A 50% OVERLAP. CUT AND REMOVE BURLAP FROM TOP
- ONE-THIRD OF THE ROOT BALL. PROVIDE PLANTING PITS AS INDICATED ON PLANTING DETAILS. BACKFILL PLANTING PITS WITH ONE PART EACH OF TOP SOIL, PEAT MOSS, AND PARENT MATERIAL. IF WET SOIL CONDITIONS EXIST THEN PLANTING PITS SHALL BE
- EXCAVATED AN ADDITIONAL 12" AND FILLED WITH SAND. 4. NEWLY INSTALLED PLANT MATERIAL SHALL BE WATERED AT THE TIME OF INSTALLATION AND SHALL BE SUBSEQUENTLY FLOODED TWICE WITHIN TWENTY-FOUR (24) HOURS OF PLANTING. REGULAR WATERING SHALL BE
- PROVIDED TO ENSURE THE ESTABLISHMENT. GROWTH AND SURVIVAL OF ALL PLANTS. 5. ALL PLANT MATERIAL SHALL BE GUARANTEED FOR ONE YEAR AFTER THE DATE OF FINAL ACCEPTANCE. ANY PLANT MATERIAL THAT DIES WITHIN THAT TIME PERIOD SHALL BE REMOVED, INCLUDING THE STUMP, AND REPLACED WITH MATERIAL OF SIMILAR SIZE AND SPECIES AT THE EXPENSE OF THE DEVELOPER. THE REPLACED PLANT MATERIAL
- SHALL BE GUARANTEED FOR ONE YEAR AFTER THE REPLACEMENT DATE. 6. THE LANDSCAPE CONTRACTOR SHALL PROVIDE A MINIMUM 4" LAYER OF TOPSOIL IN ALL LAWN AREAS AND A MINIMUM OF 6" OF TOPSOIL IN ALL PLANTING AREAS. A FULL SOIL ANALYSIS SHALL BE CONDUCTED AFTER
- CONSTRUCTION AND PRIOR TO PLANTING TO DETERMINE THE EXTENT OF SOIL AMENDMENT REQUIRED 7. ALL DISTURBED LAWN AREAS SHALL BE STABILIZED WITH EITHER SOD OR SEED AS INDICATED ON THE LANDSCAPE PLANS. SEED SHALL CONSIST OF THE MIXTURE LISTED IN THE GENERAL SEEDING NOTES. ALL DISTURBED LAWN AREAS SHALL BE TOP SOILED, LIMED, FERTILIZED, AND FINE GRADED PRIOR TO LAWN INSTALLATION.
- 8. ALL PLANTING BEDS SHALL RECEIVE 3" OF SHREDDED PINE, CEDAR OR HEMLOCK BARK. 9. ALL SHRUB MASSES SHALL BE PLANTED IN CONTINUOUS MULCHED BEDS.
- 10. ALL TREES ARE TO BE GUYED, 3 EACH, UNLESS OTHERWISE NOTED ON PLAN.
- 11. ALL DECIDUOUS TREES ARE TO BE WRAPPED, WITH TREE WRAP, UP TO THE FIRST BRANCHING AND SECURED.
- 12. THE LANDSCAPE CONTRACTOR IS TO PERFORM ALL CONTRACTED WORK IN A REASONABLE PERIOD OF CONTINUOUS
- 13. THE LANDSCAPE CONTRACTOR IS TO MAINTAIN PLANT MATERIAL WHILE THE PROJECT IS UNDERWAY AND FOR A PERIOD OF TWO WEEKS AFTER THE COMPLETION OF THE PROJECT UNLESS OTHERWISE SPECIFIED.
- 14. THE CONTRACTOR IS TO CLEAN UP AND REMOVE ANY DEBRIS FROM THE SITE, CAUSED BY THE LANDSCAPE

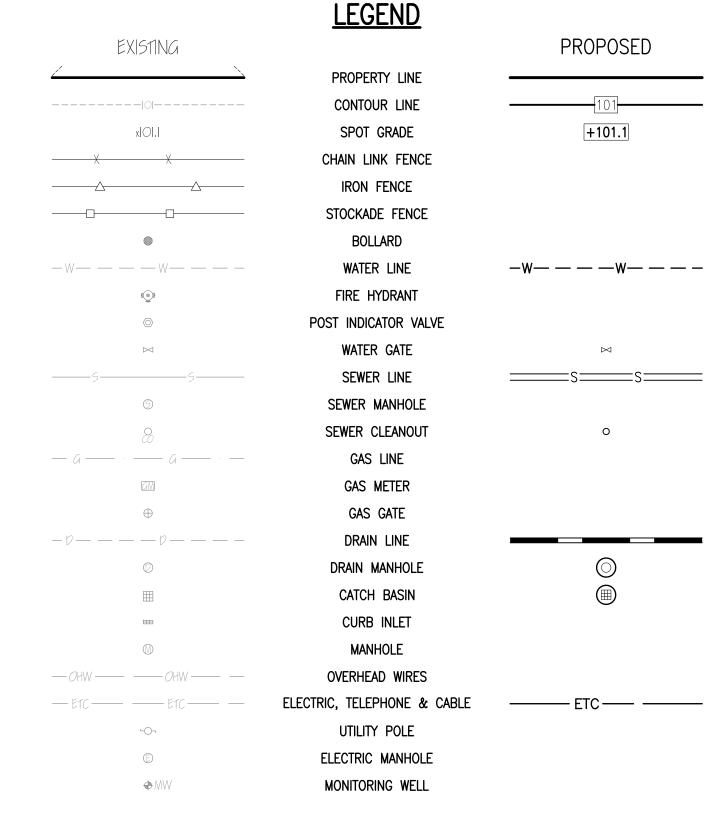

**REVISIONS** 6/28/21 PER PLANNER COMMEN PER DPI COMMENTS





# /ww.FarlandCorp.cor

1 VENTURA DRIVE ARTMOUTH, MA 02747 P. 508. 717. 3479

- ENGINEERING
- SITEWORK LAND SURVEYING
- DEVELOPMENT

DRAWN BY: SC DESIGNED BY: SC

CHECKED BY: CAF  $\mathbf{O}$  $\mathsf{O}$ 


105 USI I EE TS AC NO NO NO SC -

40 EDIS RS MAP BEDFORE ESSO| NEW

JUNE 24, 2021 SCALE: AS NOTED JOB NO. 21-253

LATEST REVISION: SEPTEMBER 3, 2021

NOTES & LEGEND SHEET 2 OF 9

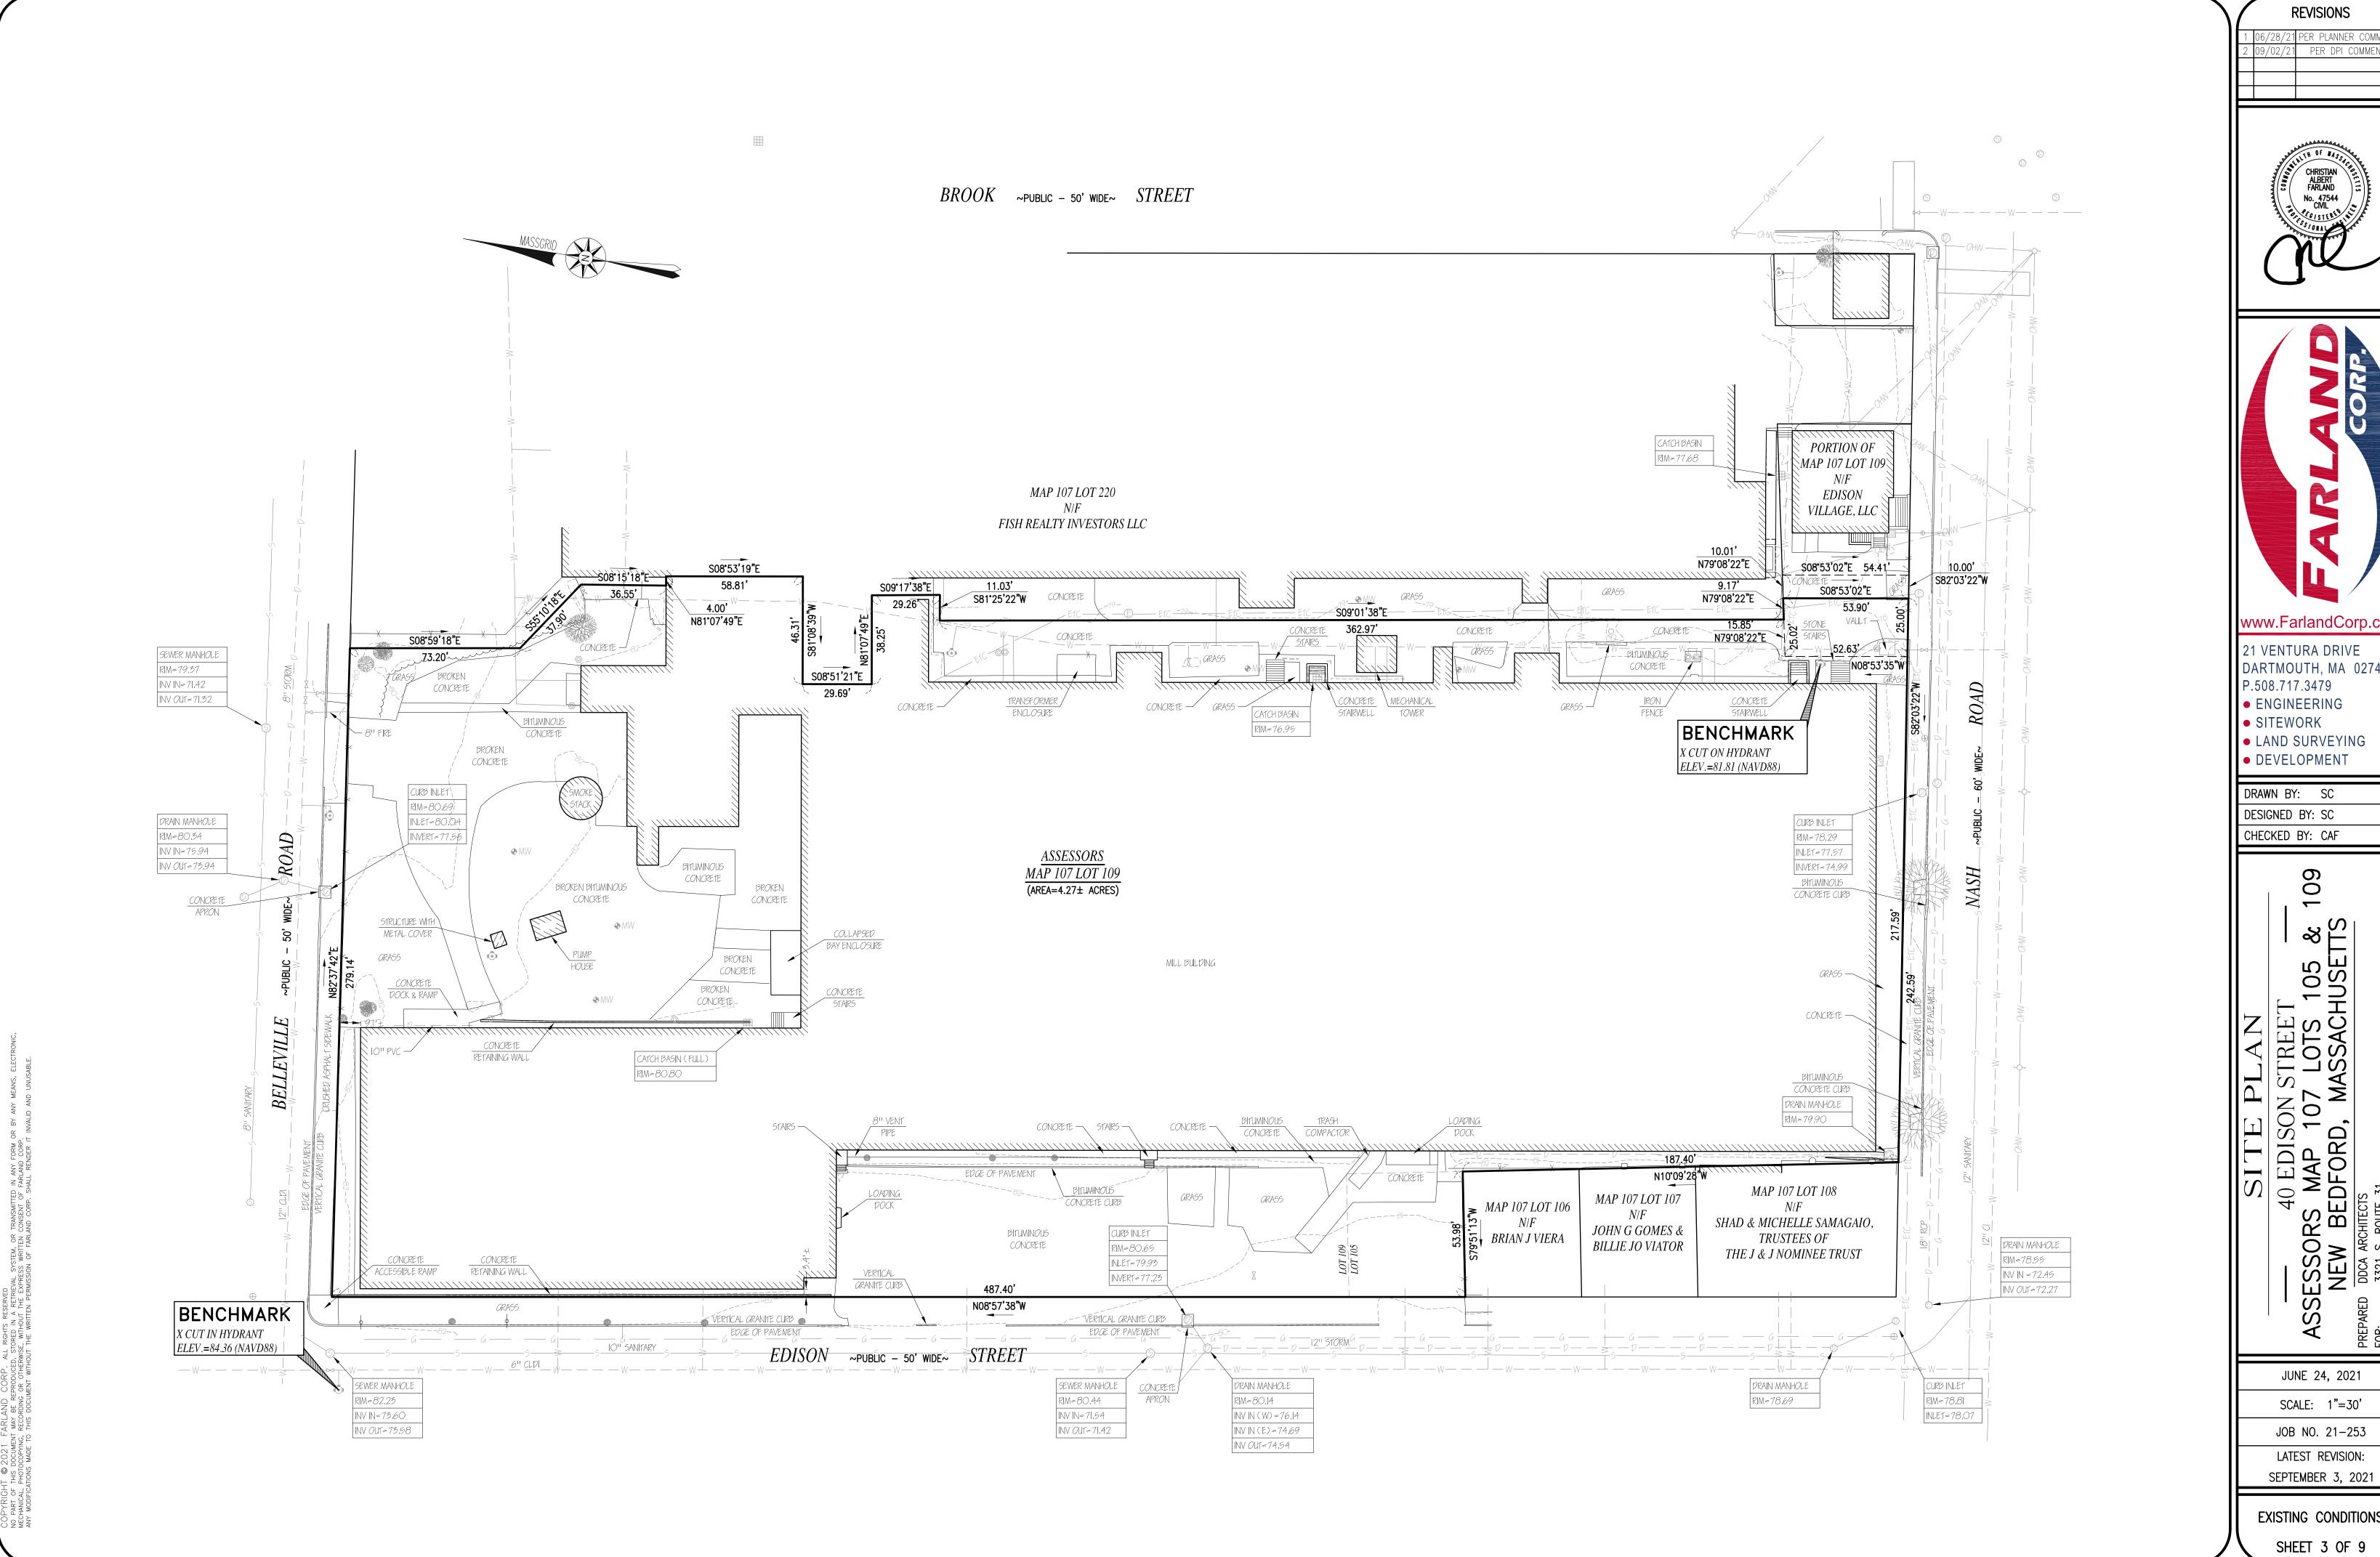

06/28/21 PER PLANNER COMMENT /21 PER DPI COMMENTS





# www.FarlandCorp.com

DARTMOUTH, MA 02747 P.508.717.3479

DRAWN BY: SC DESIGNED BY: SC


CHECKED BY: CAF

09 ASSESSORS MAP 107 LOTS 105 & NEW BEDFORD, MASSACHUSETTS

JUNE 24, 2021 SCALE: 1"=30'

LATEST REVISION:

**EXISTING CONDITIONS** 

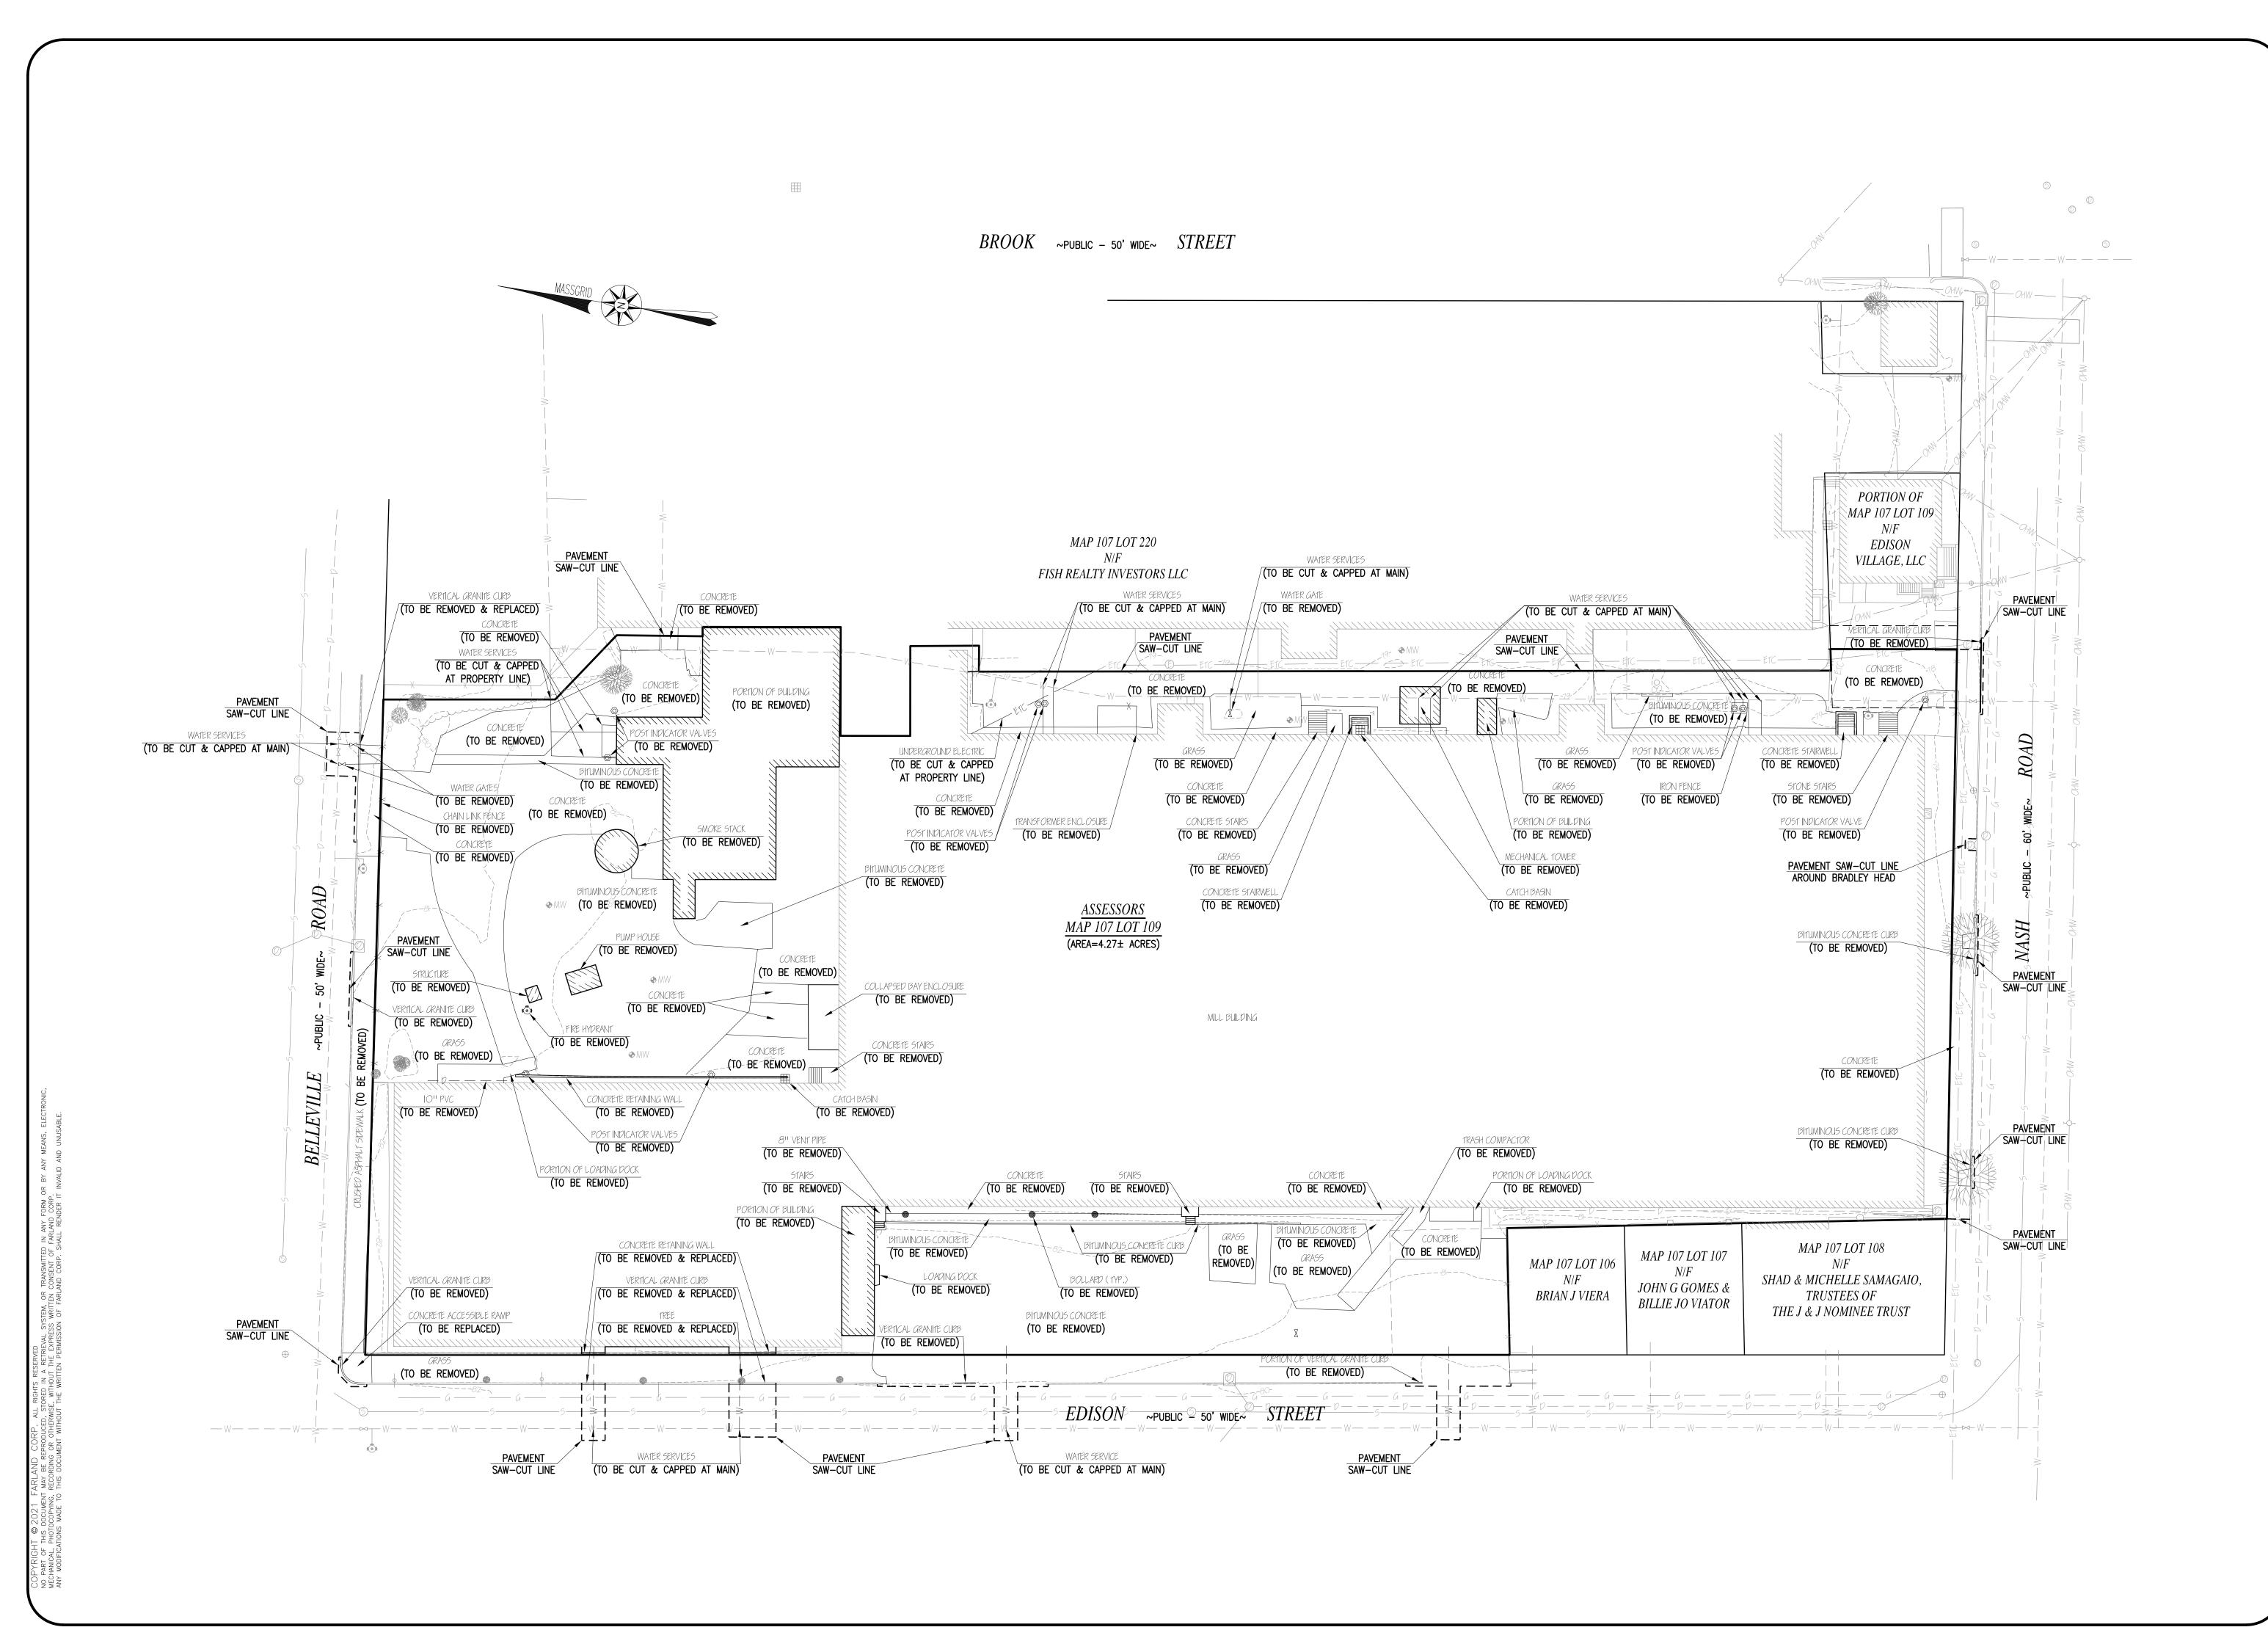

**REVISIONS** 

06/28/21 PER PLANNER COMMENT /21 PER DPI COMMENTS





# www.FarlandCorp.com

21 VENTURA DRIVE DARTMOUTH, MA 02747 P.508.717.3479

- ENGINEERING
- SITEWORK
- LAND SURVEYING DEVELOPMENT

DRAWN BY: SC DESIGNED BY: SC

CHECKED BY: CAF

9 0


% ∏ S SITE PLAN

--- 40 EDISON STREET
SSESSORS MAP 107 LOTS 105
NEW BEDFORD, MASSACHUSE

JUNE 24, 2021 SCALE: 1"=30'

JOB NO. 21-253 LATEST REVISION: SEPTEMBER 3, 2021

DEMOLITION SHEET 4 OF 9

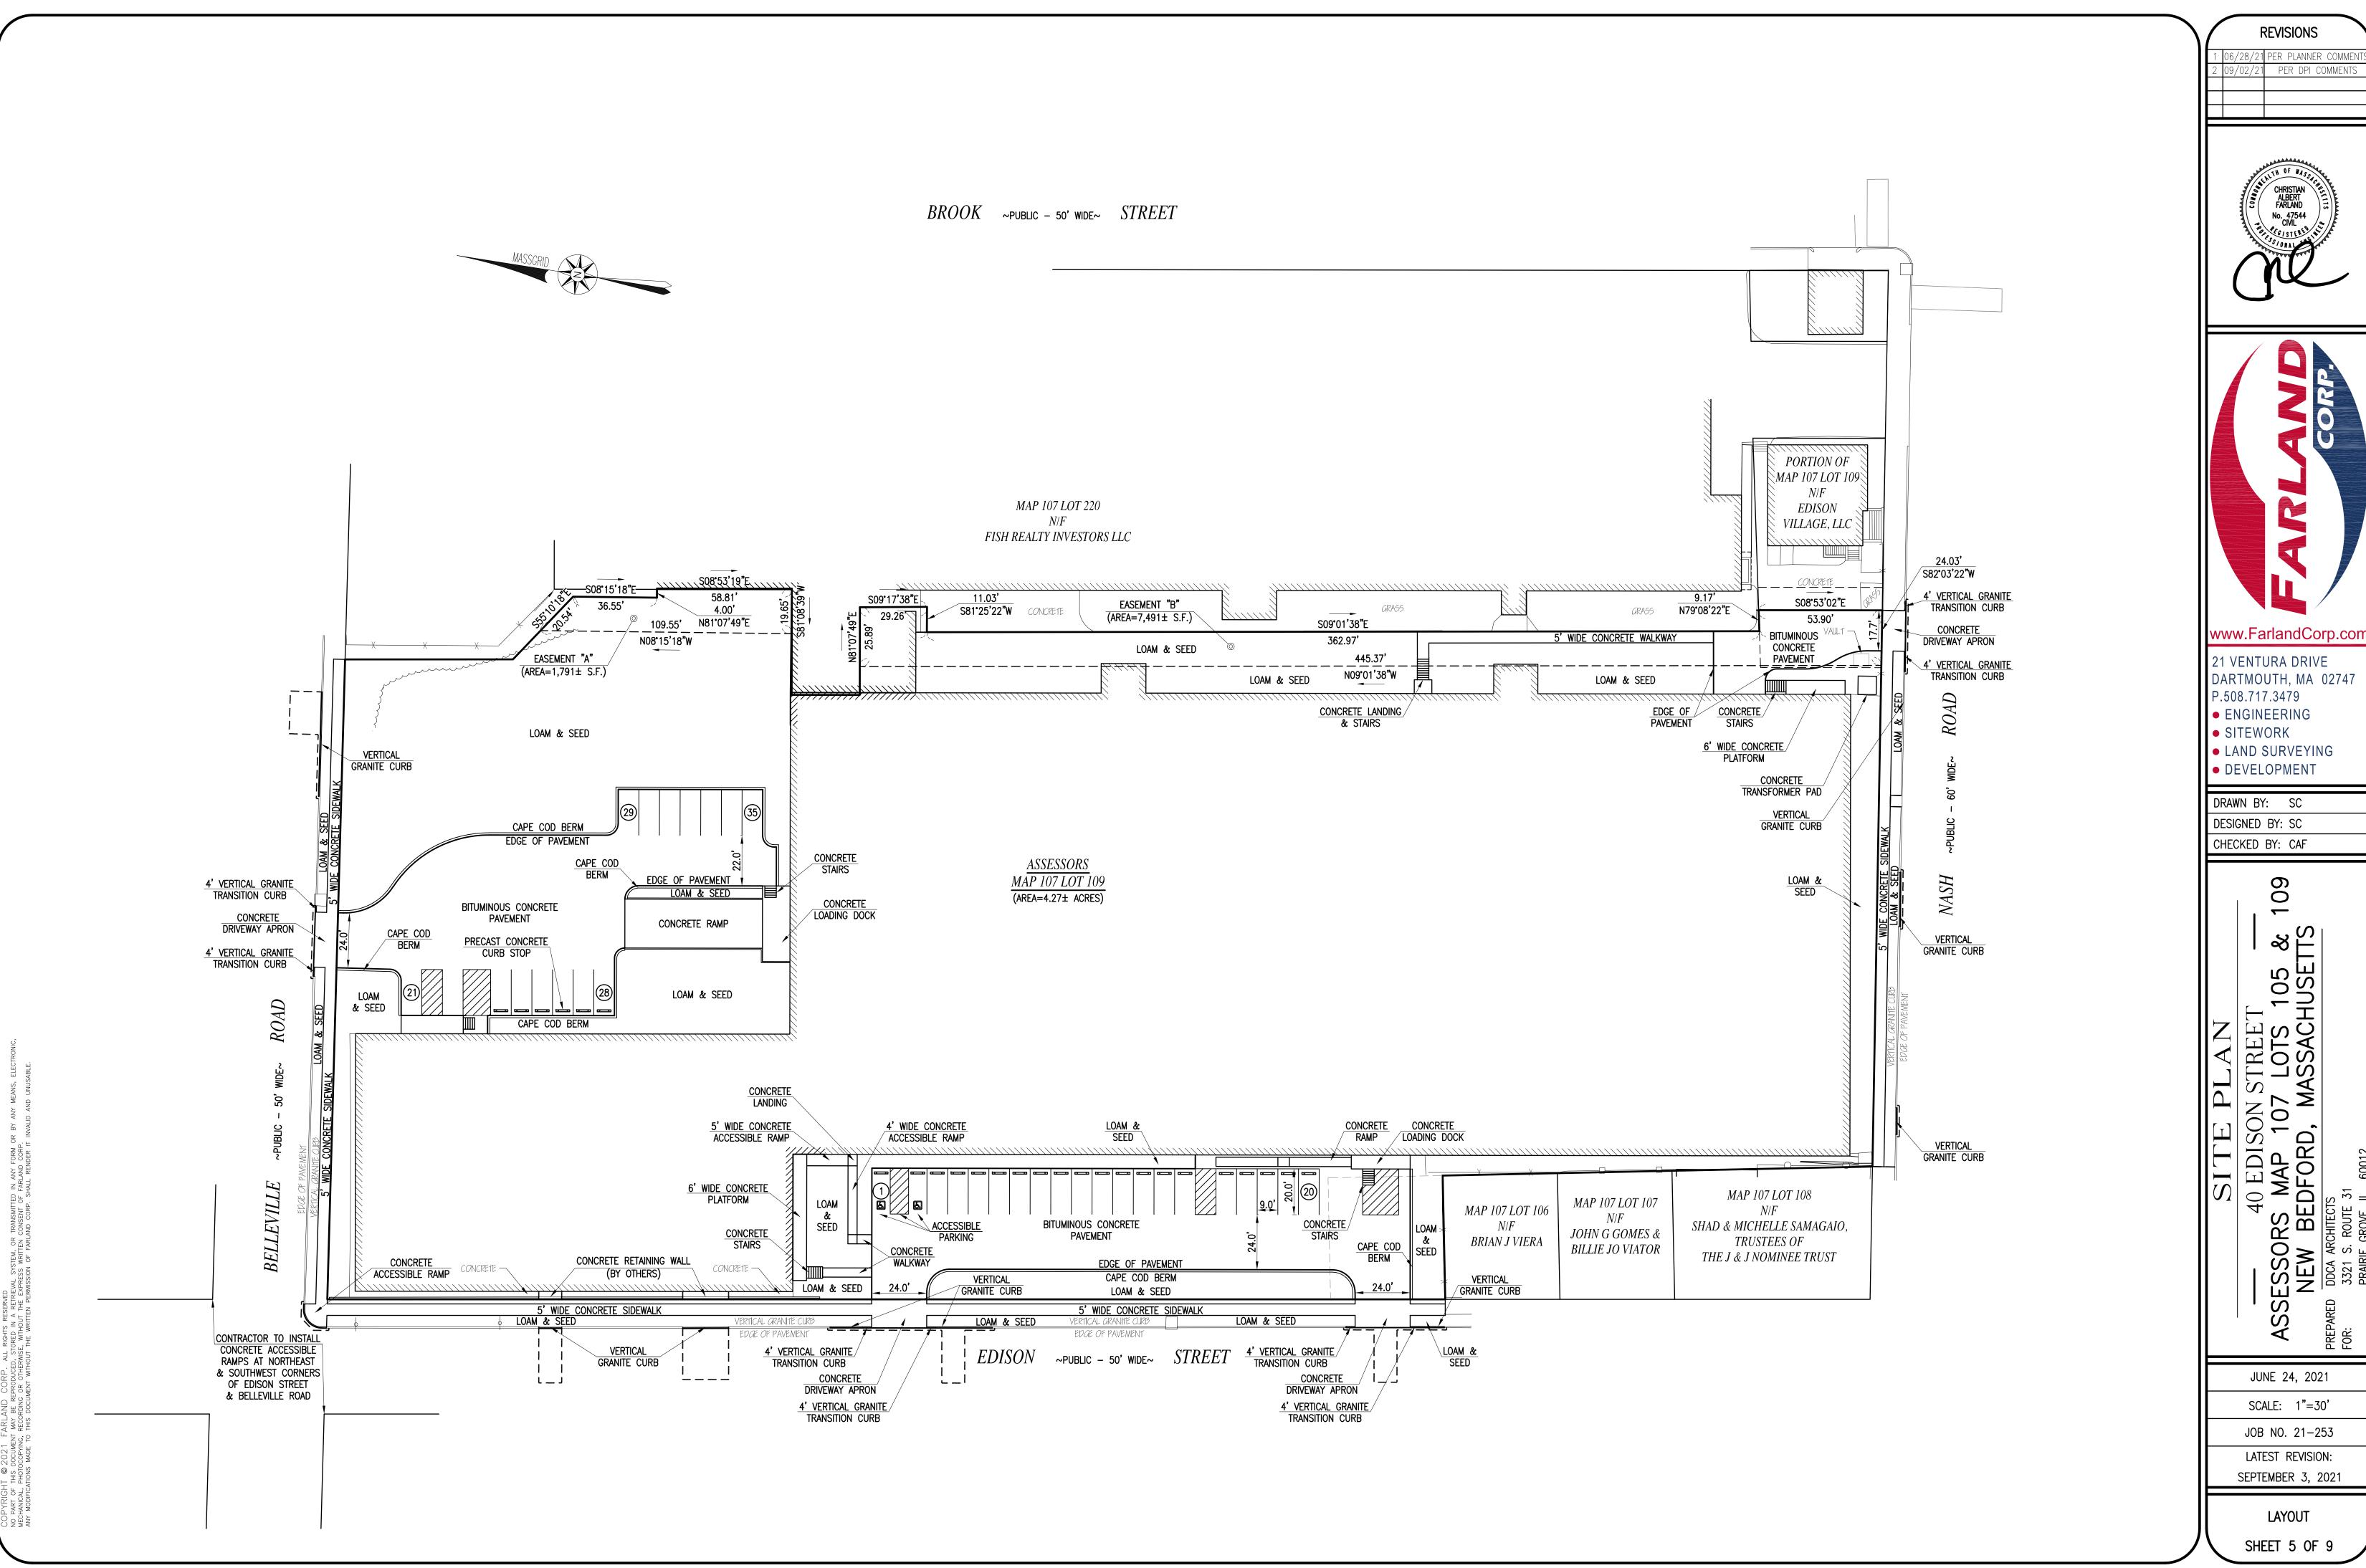

/21 PER DPI COMMENTS






DARTMOUTH, MA 02747

JUNE 24, 2021

SCALE: 1"=30' JOB NO. 21-253


SEPTEMBER 3, 2021

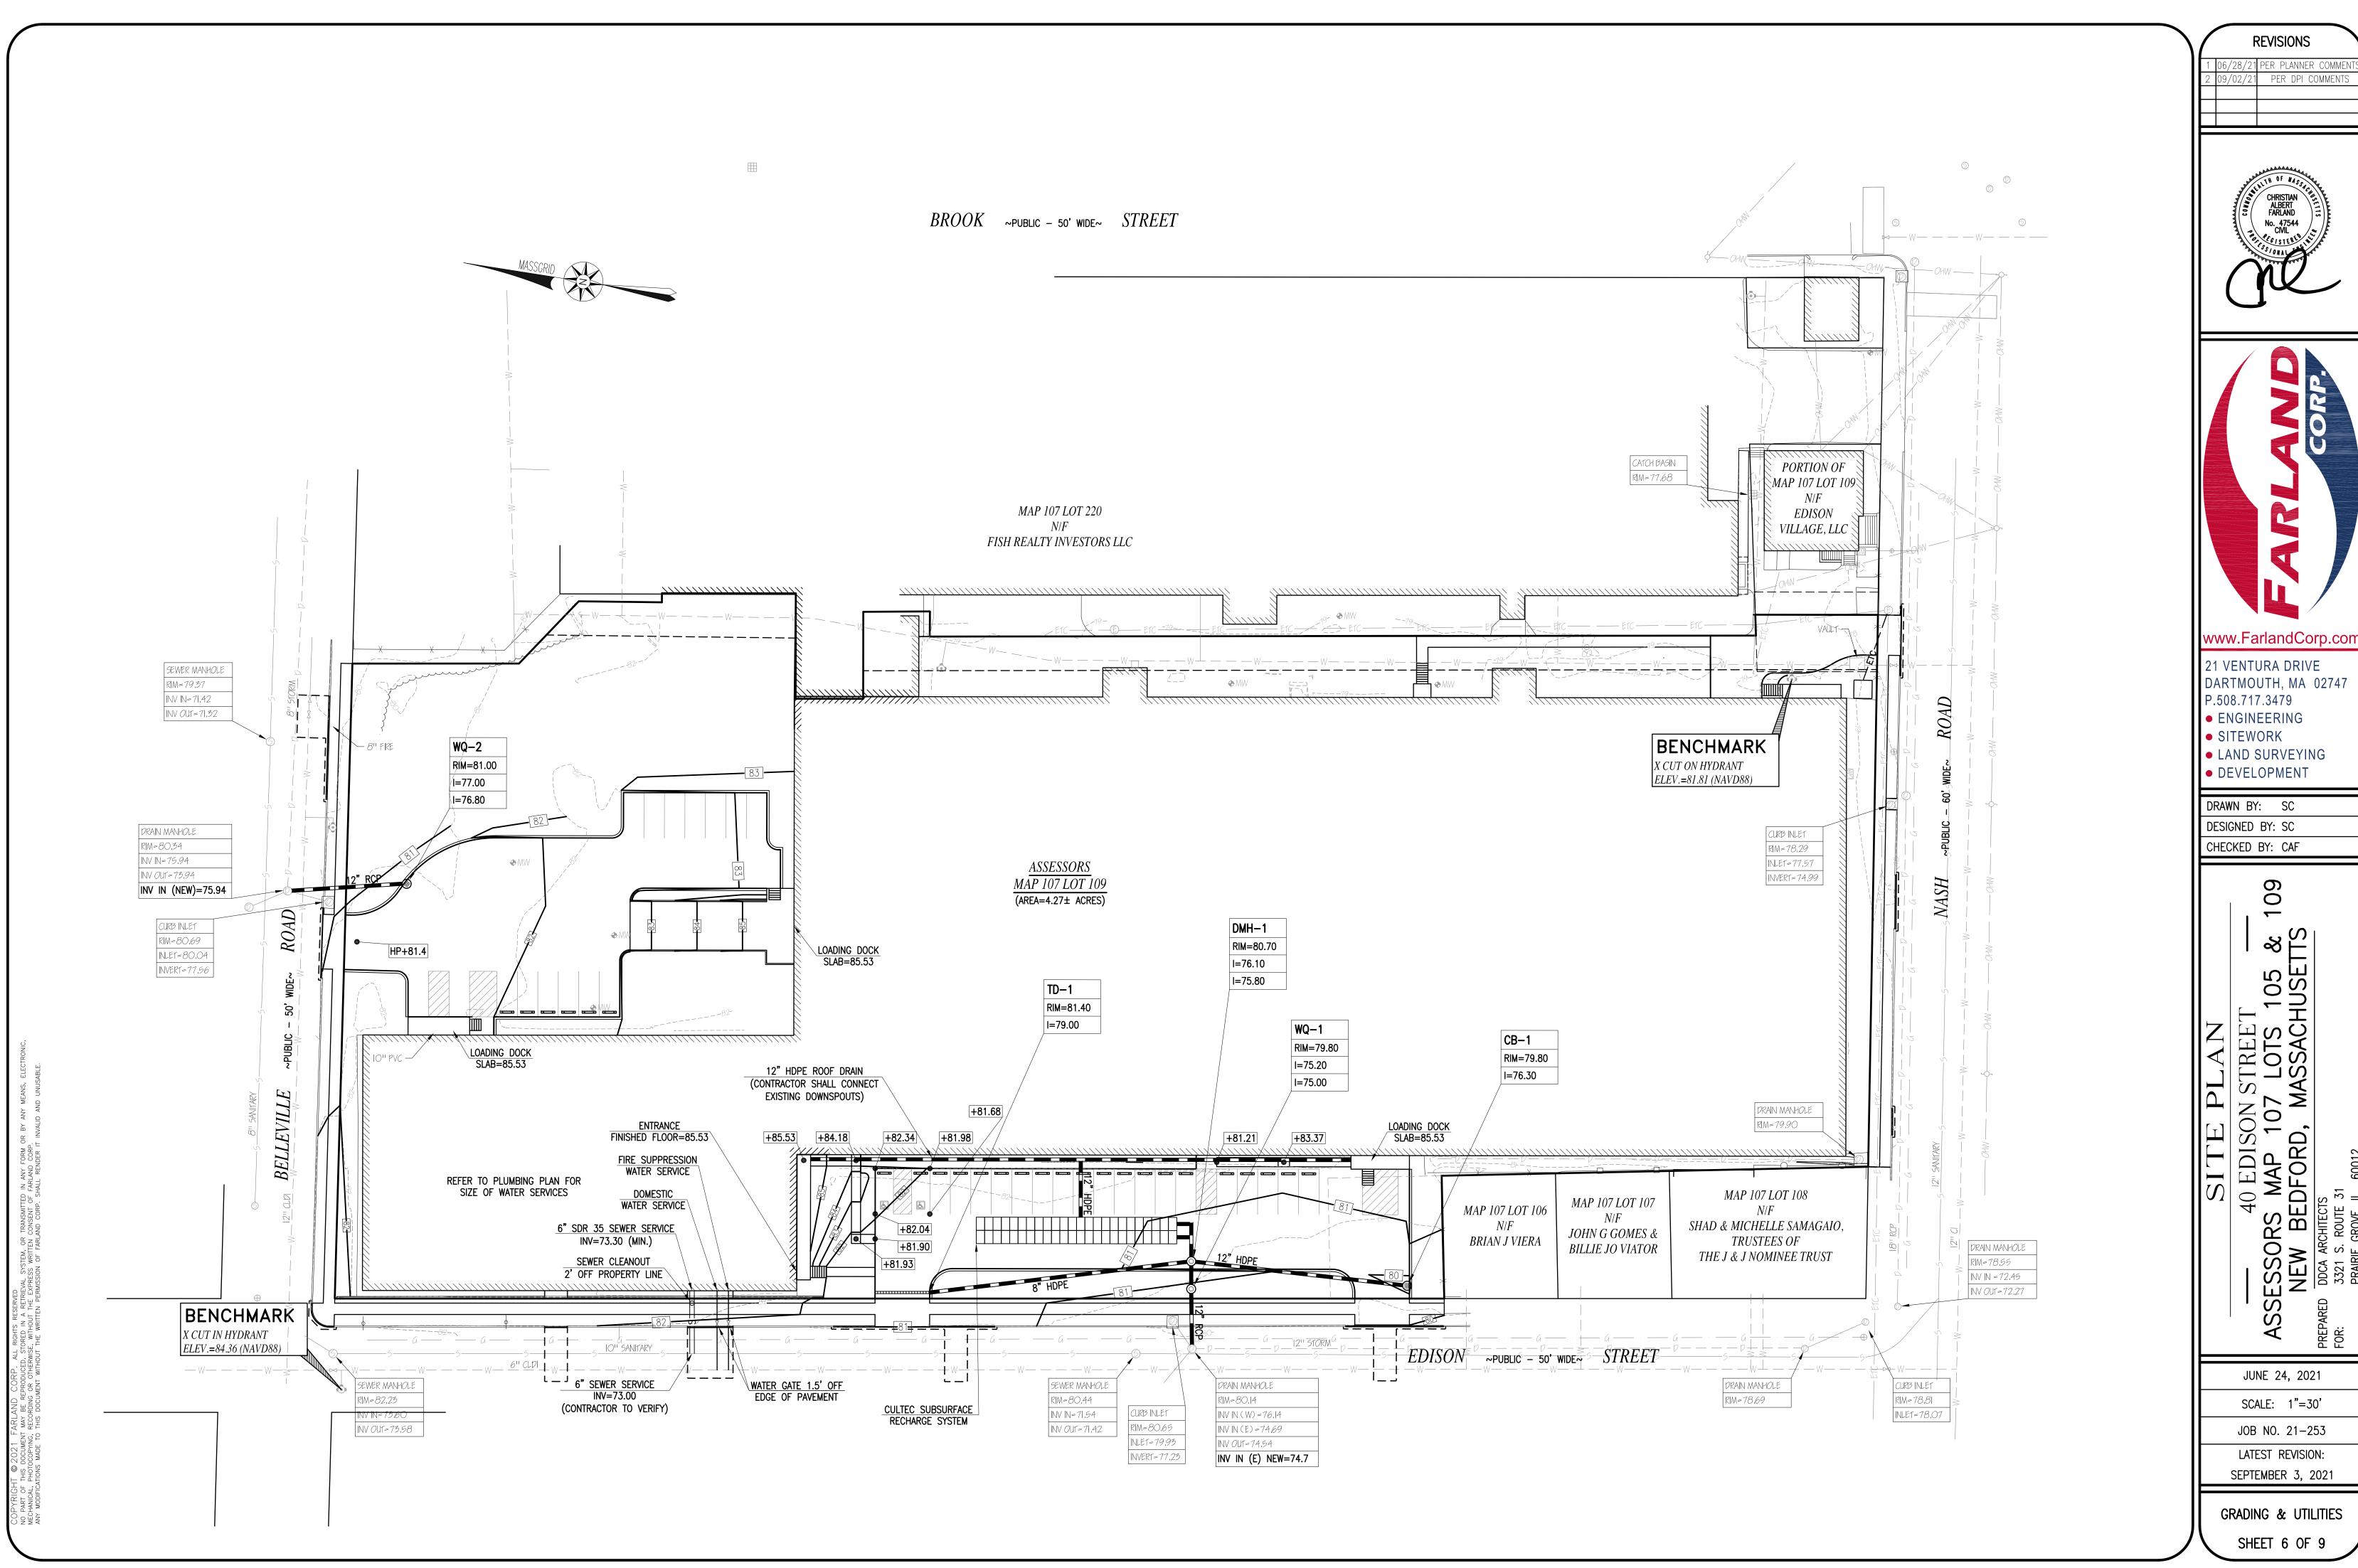



LANDSCAPE TABLE						
SYMBOL	BOTANICAL NAME	COMMON NAME	SIZE	QUANTIT		
		TREES				
	OSTRYA VIRGINIANA	HOP HORN	5'-6' HT	2		
\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	CERCIS CANDENSIS	EASTERN RED BUD	5'-6' HT	9		
	PRUNUS	CHERRY	5'-6' HT	4		
	PRUNUS CERASIFERA	PURPLE LEAF PLUM	5'-6' HT	6		
	S	HRUBS				
¢	LLEX GLABRA 'SHAMROCK'	INKBERRY	2 GAL.	27		
*	JUNIPERUS SQUAMATA	BLUE STAR	2 GAL.	21		
<b>※</b>	HYDRANGEA MACROPHYLLA 'NIKKO BLUE'	NIKKO BLUE HYDRANGEA	2 GAL.	18		
*	HEMEROCALLIS	DAYLILY	2 GAL.	53		
*	MYRICA PENNSYLVANICA	BAYBERRY	2 GAL.	19		

ROAD

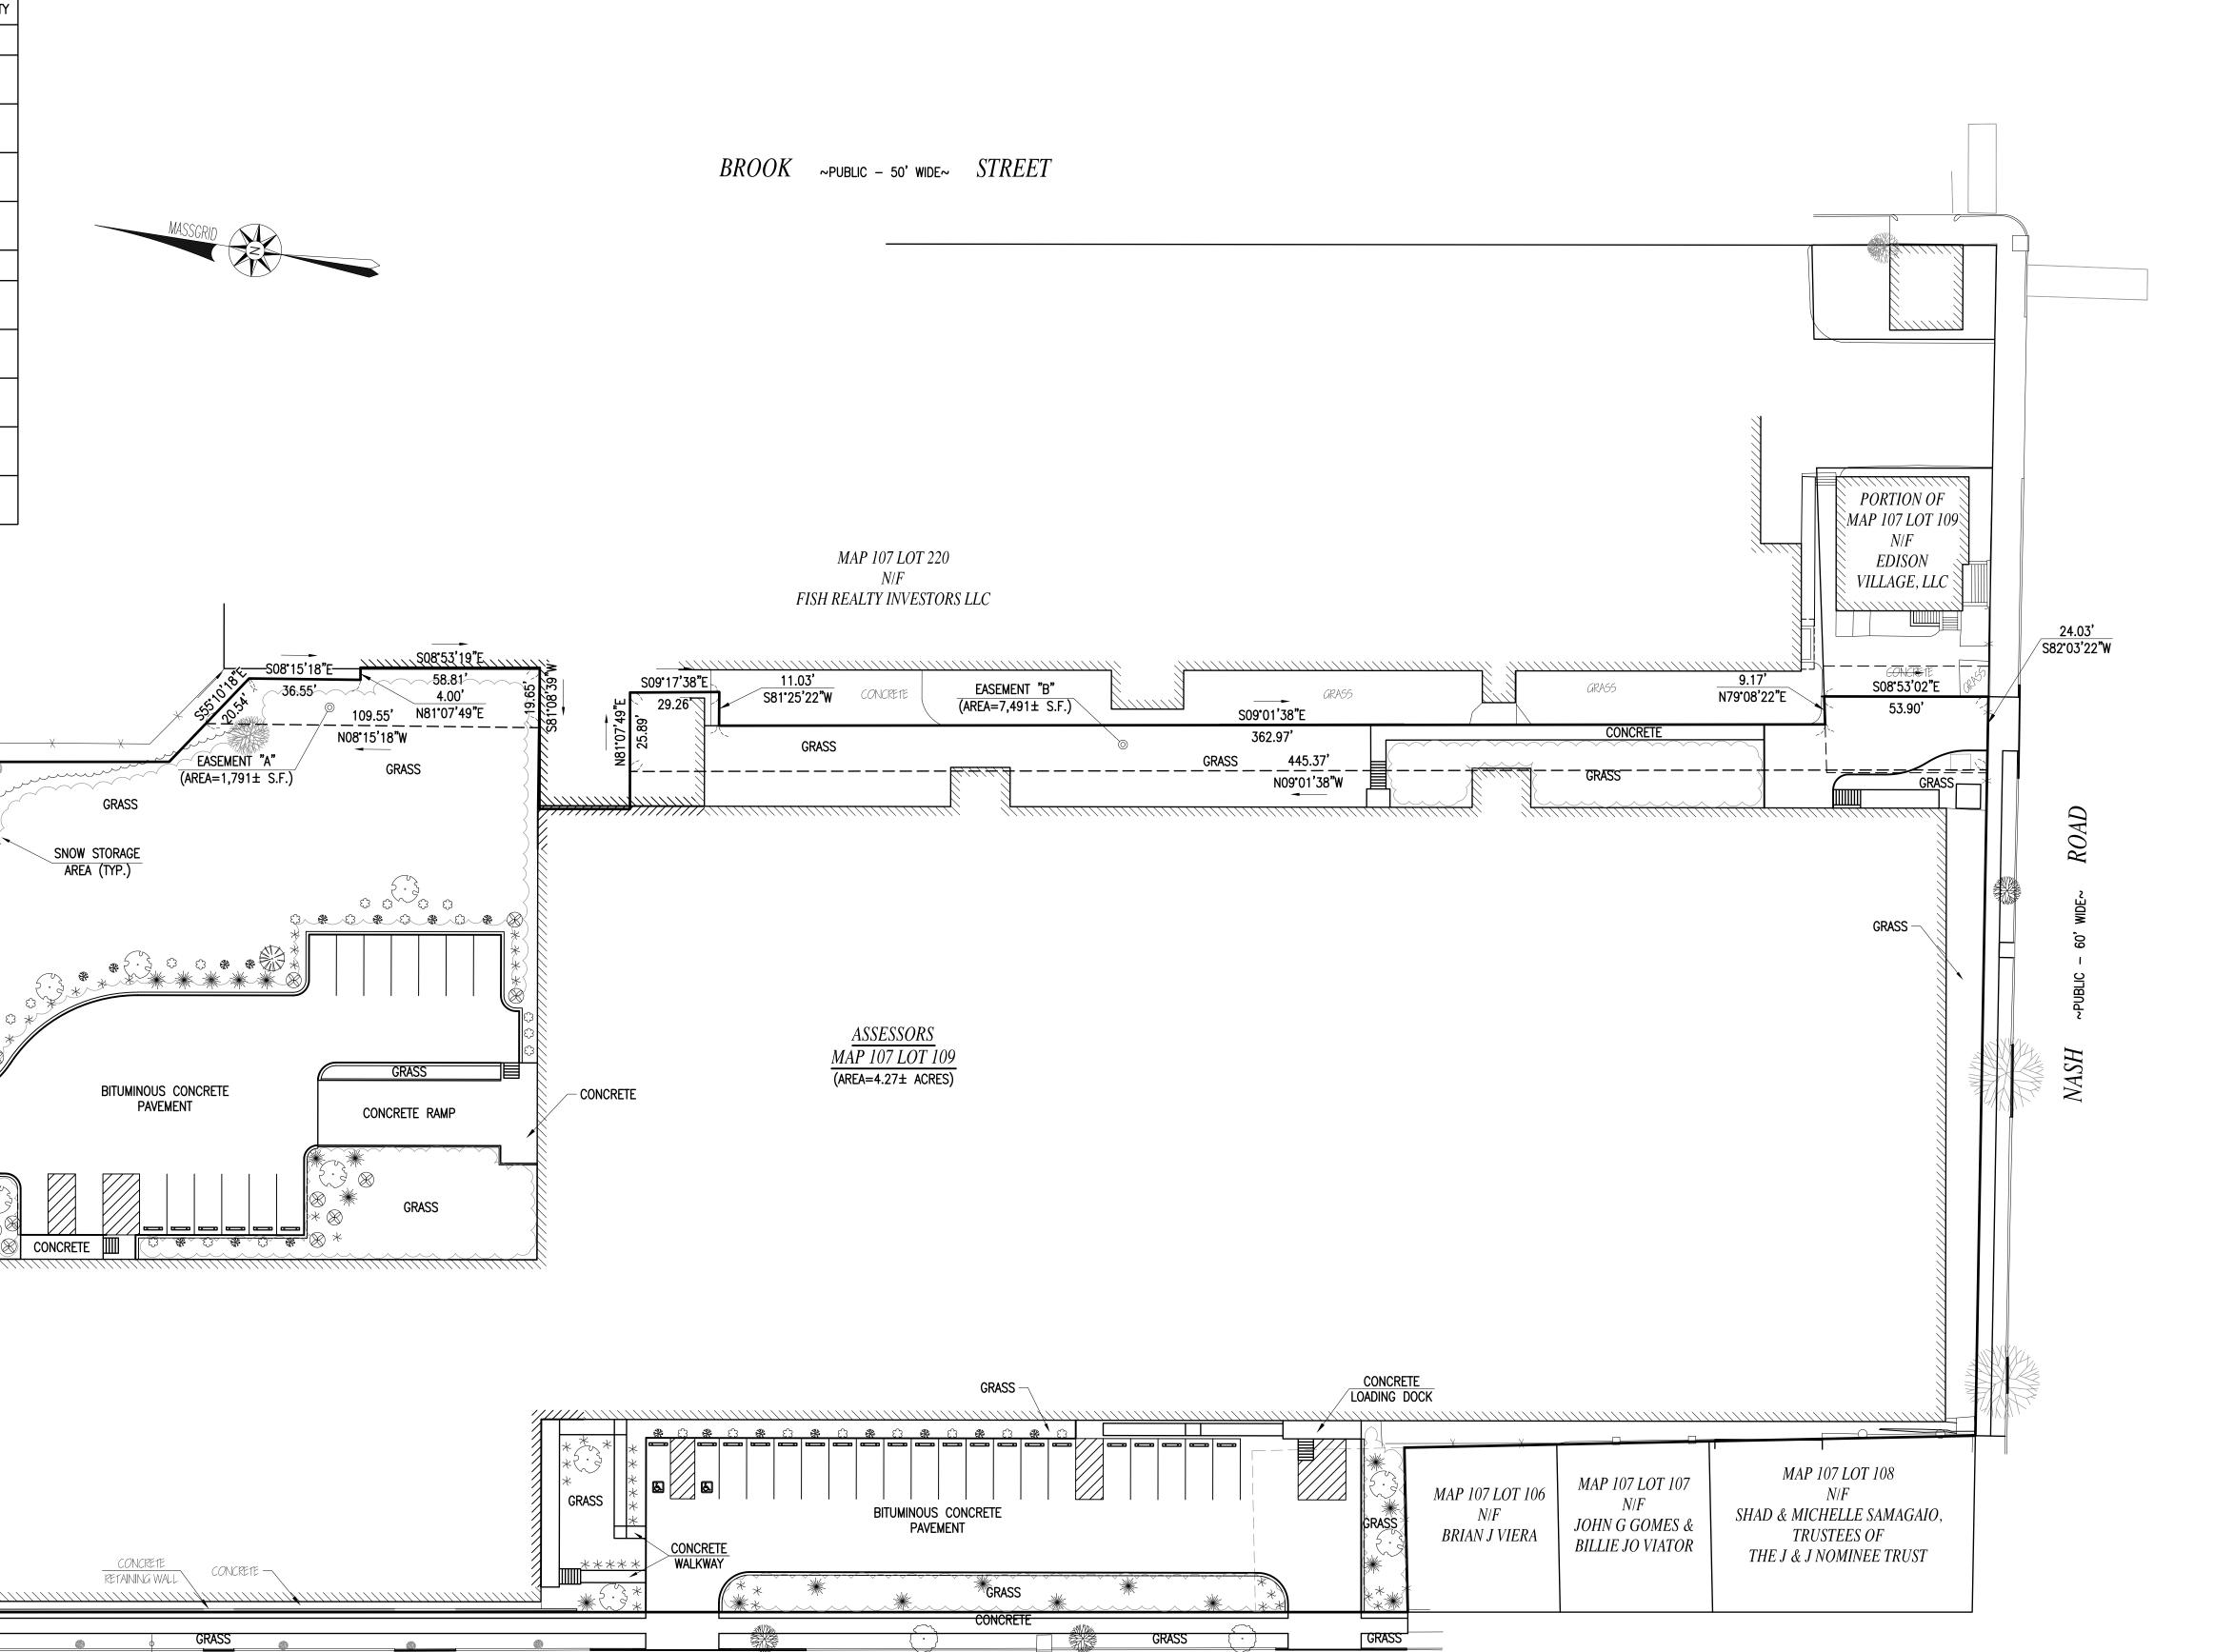

EDISON ~PUBLIC - 50' WIDE~ STREET

06/28/21 PER PLANNER COMMENT 2/21 PER DPI COMMENTS





# www.FarlandCorp.com

21 VENTURA DRIVE DARTMOUTH, MA 02747 P.508.717.3479

- ENGINEERING
- SITEWORK
- LAND SURVEYING

DEVELOPMENT

DRAWN BY: SC DESIGNED BY: SC

CHECKED BY: CAF 09 % ∏S ASSESSORS MAP 107 LOTS 105 NEW BEDFORD, MASSACHUSE

JUNE 24, 2021 SCALE: 1"=30'

JOB NO. 21-253

LATEST REVISION: SEPTEMBER 3, 2021

LANDSCAPE SHEET 7 OF 9 NOTE: UNLESS OTHERWISE NOTED ON PLANS, CONTRACTION

JOINTS TO BE 5'-0" O.C. AND EXPANSION JOINTS TO

BE 40'-0" O.C. MAX., OR AT BACK OF CURB, CHANGE

FACE OF STRUCTURE.

COMPACTED SUBGRADE

ENTRAINED CONCRETE

6X6, 1.4/1.4 WWF, CENTERED IN SLAB

PREMOLDED

OF DIRECTION, OTHER WALK, UTILITY APPURTENANCE, OR

**EXPANSION JOINT** 


JOINT SEALANT

HOLD DOWN 1/8"

1/2" MAX

-1/8" RADIUS

1. TACK COAT - PROVIDE EMULSIFIED ASPHALT WHICH CONFORMS TO THE REQUIREMENTS OF THE STATE SPECIFICATIONS, DILUTED WITH ONE PART WATER TO ONE ONE PART ASPHALT FOLLOWING AASHTO M140/ASTM D997, OR AASHTO M208/ASTM D2397, SS-1H, CSS-1, OR CSS-1H.

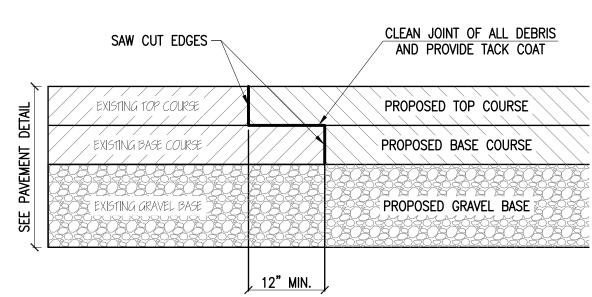

CAST IRON CURB BOX

" MINIMUM

COPPER OR

PLASTIC TUBING

CURB STOP AT

PROPERTY LINE

4'-6" MIN

5'-6" MAX T

COUPLING -

1" MINIMUM


COPPER OR

PLASTIC TUBING

MIN


√1" MINIMUM I

COPPER

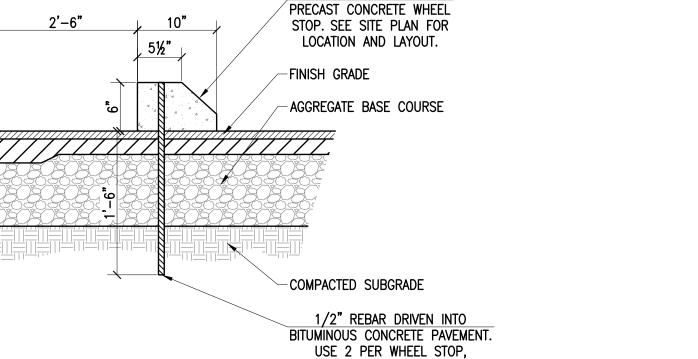

PLACE 6" (MIN.) FROM END.

10"x6"x6' REINFORCED

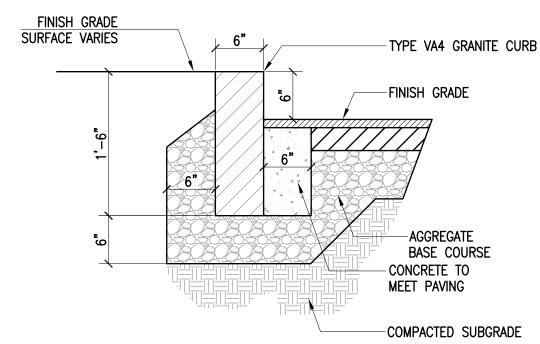

# BITUMINOUS CONCRETE PAVEMENT

NOT TO SCALE

CONCRETE WALK 4" 4"

1/8" RADIUS

△1/2" MAX 📈

**CONTROL JOINT** 

TOOLED

JOINT




NOT TO SCALE

FINISH GRADE

MIN DEPTH




NOT TO SCALE

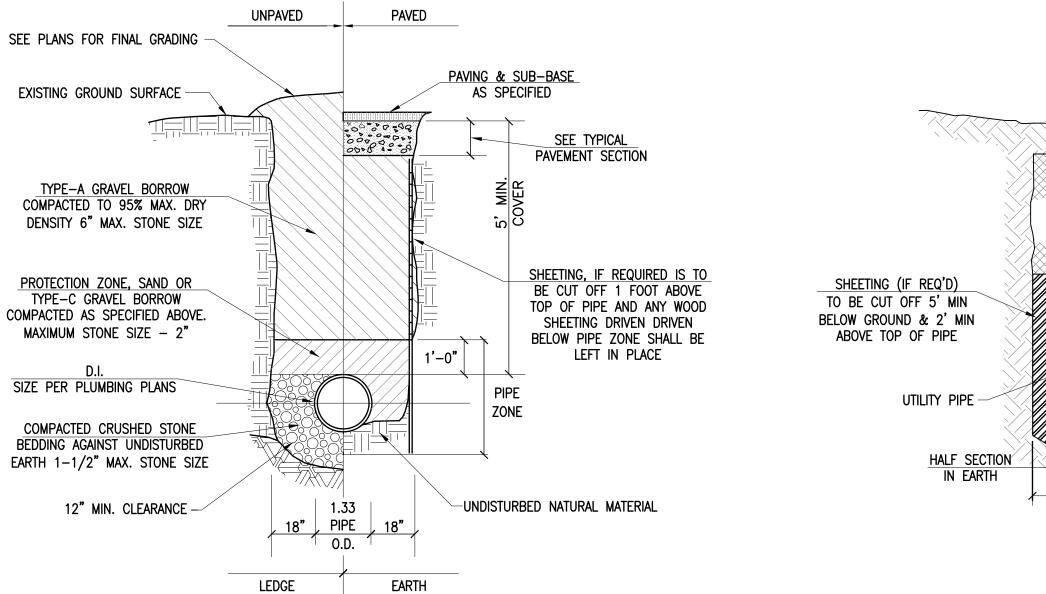




NOT TO SCALE

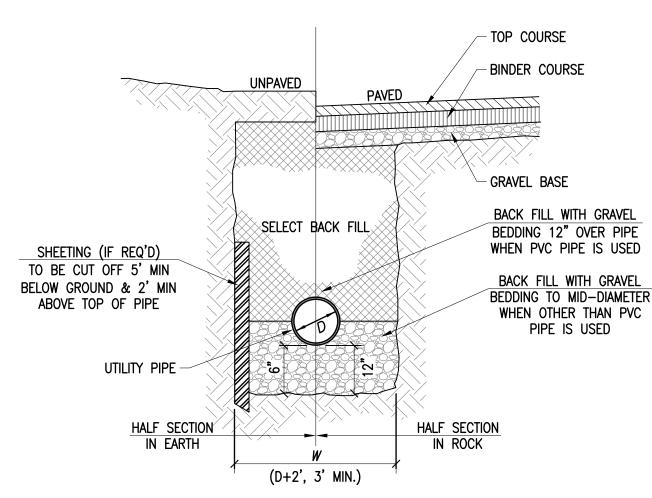

# CONCRETE PAVEMENT SIDEWALK

NOT TO SCALE

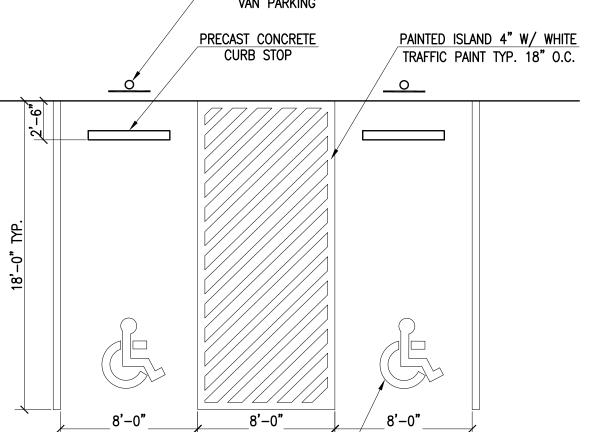


## WATER SERVICE CONNECTION

6" LOOP

CORPORATION

WATER MAIN

NOT TO SCALE

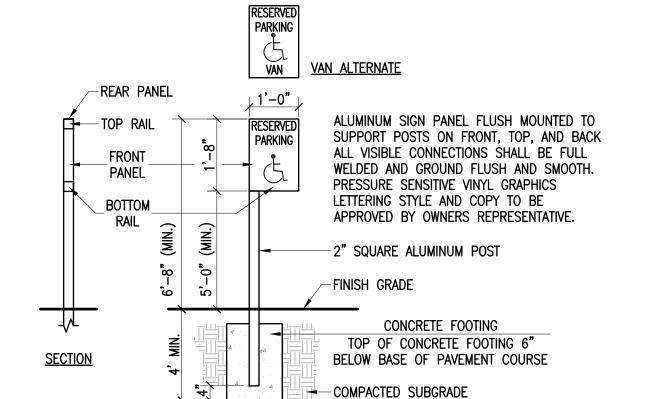


## TYPICAL WATER TRENCH

NOT TO SCALE

# UTILITY TRENCH

NOT TO SCALE

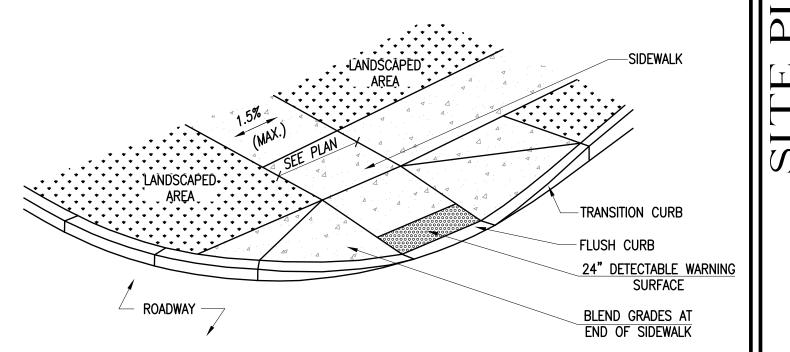

RAMP CROSS SECTION TO BE THE SAME AS ADJACENT SIDEWALK; I.E. DEPTH OF SURFACE AND FOUNDATION. DIMENSIONS ARE SUBJECT TO CHANGE IN FIELD. ALL SLOPES AND DIMENSIONS TO COMPLY WITH A.D.A. AND MAAB REQUIREMENTS.


PROVIDE EXPANSION JOINT AT TOPS OF RAMP AND AT BACK OF WALK AT INTERFACE OF CURB. PROVIDE HEAVY BROOM FINISH ON RAMP AND SIDE SLOPES PERPENDICULAR TO FLOW OF TRAFFIC.

MINIMUM WALK DIMENSIONS ARE FROM BACK OF CURB. TRANSITION CURB LENGTH AS REQUIRED TO MEET CODE.

. FIXED OBJECTS (I.E. UTILITY POLES, HYDRANTS, ETC.) MUST NOT ENCROACH ON ANY PART OF A WHEELCHAIR RAMP, INCLUDING TRANSITION SLOPES.


8. AT NO TIME IS ANY PORTION OF THE WHEELCHAIR RAMP, EXCLUDING CURB TRANSITIONS, TO BE LOCATED OUTSIDE OF THE CROSSWALK.

NOT TO SCALE

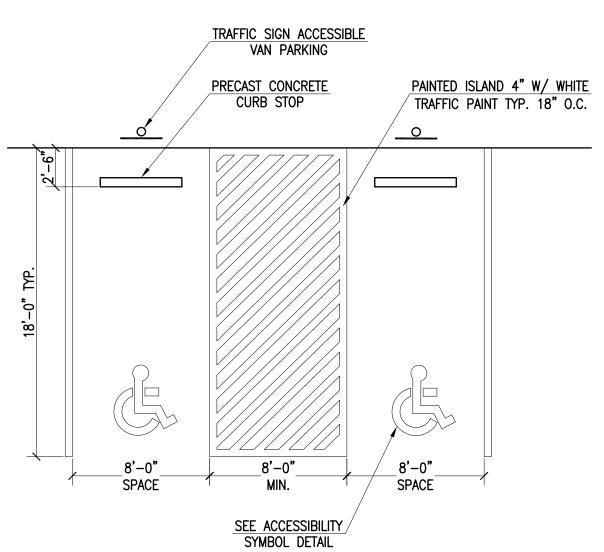

ACCESSIBLE PARKING LAYOUT

NOT TO SCALE

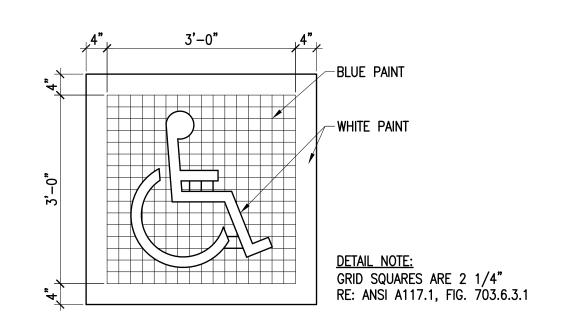

ACCESSIBLE PARKING SYMBOL

NOT TO SCALE

ACCESSIBLE PARKING SIGN

NOT TO SCALE

ACCESSIBLE RAMP TYPE A

DETAILS

SSESSORS MAP 107 L
NEW BEDFORD, MAS JUNE 24, 2021

**REVISIONS** 

No. 47544 CIVIL

www.FarlandCorp.com

DARTMOUTH, MA 02747

21 VENTURA DRIVE

P.508.717.3479

SITEWORK

ENGINEERING

DEVELOPMENT

DRAWN BY: SC

DESIGNED BY: SC

CHECKED BY: CAF

9

0

STREET
7 LOTS 105
MASSACHUSET


LAND SURVEYING


06/28/21 PER PLANNER COMMEN /21 PER DPI COMMENTS

SCALE: AS NOTED JOB NO. 21-253

LATEST REVISION: SEPTEMBER 3, 2021

SHEET 8 OF 9

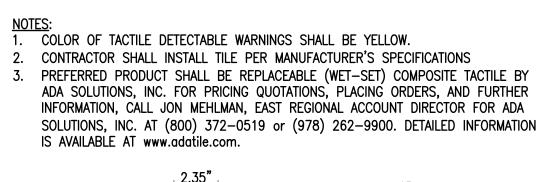

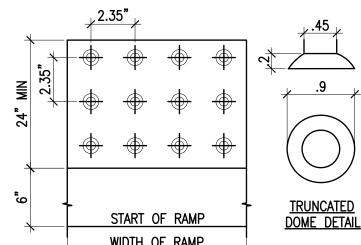

3. JOINT SEALANT BETWEEN

PREFORMED BUTYL RUBBER.

5 BRICK COURSES MAX.)

PRECAST SECTIONS SHALL BE

SET IN FULL MORTAR BED. ADJUST

\*5' DIA. FOR DOUBLE

CATCH BASIN

MORTAR. (2 BRICK COURSES MIN. ENGINEER.

-SEE NOTE 3

CLEARANCE TO OUTSIDE OF TO GRADE WITH CLAY BRICK AND APPROVED EQUAL BY THE

5. FRAME AND GRATE TO BE

WITH SG-1 GRATE.

EQUAL TO LEBARON LK 120 (3

FLANGE) OR LK 121 (4 FLANGE)

DOUBLE FRAME AND GRATE SHALL

BE LEBARON TYPE R-3531 B OR

### DETECTABLE WARNING DETAIL

2. PROVIDE "V" KNOCKOUTS 4. CATCH BASIN FRAME SHALL BE

8"SQUARE 8"

NOT TO SCALE

1. ALL SECTIONS


CONNECTIONS.

CONE

SHALL BE DESIGNED


FOR HS-20 LOADING.


PIPE. MORTAR ALL PIPE

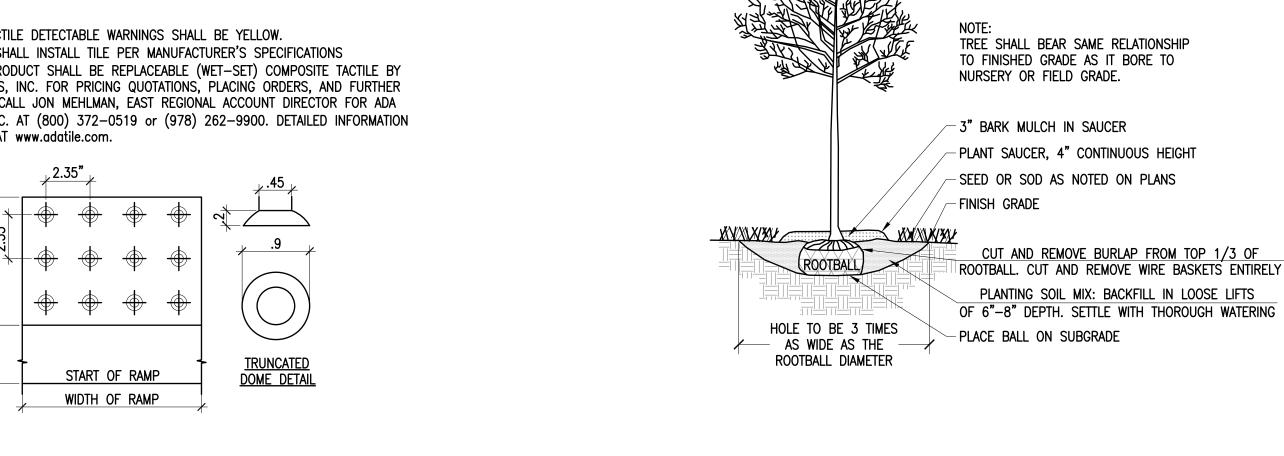

## TREE PLANTING

NOT TO SCALE

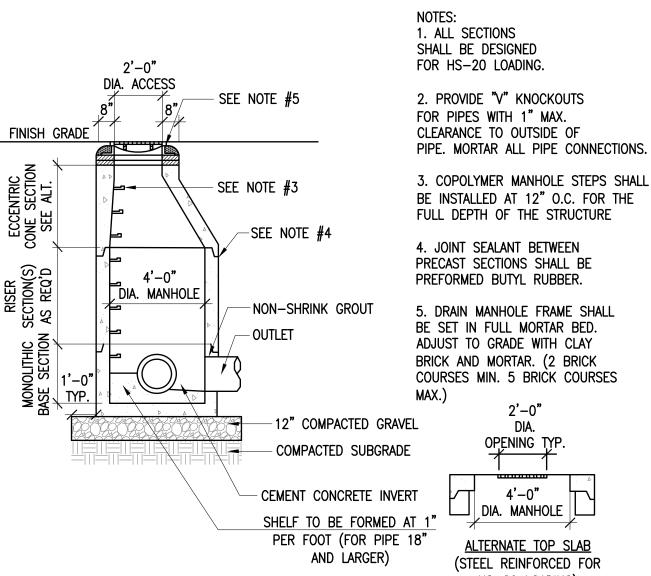

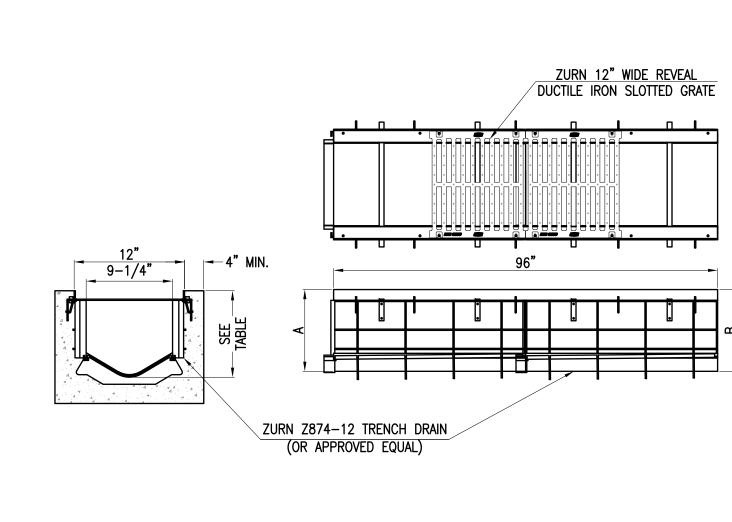

3" BARK MULCH IN SAUCER, NOT TO BE FILLED AGAINST ROOT FLARE OR TRUNK.

PLANT SAUCER, 4" CONTINUOUS, NO SAUCERWHERE SHRUBS OCCUR IN BEDS.

CUT AND REMOVE ALL BURLAP FROM ROOT BALL.

PLANTING SOIL MIX: BACKFILL IN LOOSE LIFTS

PLACE ROOT BALL ON UNDISTURBED SOIL. IF SOIL HAS BEEN DISTURBED, COMPACT TO MINIMIZE SETTLING.

OF 6"-8" DEPTH. SETTLE WITH THOROUGH WATERING.

- FINISH GRADE

1. SHRUB SHALL BEAR SAME RELATIONSHIP TO FINISHED GRADE

AS IT BORE TO NURSERY OR FIELD GRADE.


PROVIDE 2' DEEP CONTINUOUS LOAM BED.

2. WHERE SHRUBS OCCUR IN GROUPINGS IN PLANT BEDS,

ROOTBALL


SHRUB PLANTING

NOT TO SCALE

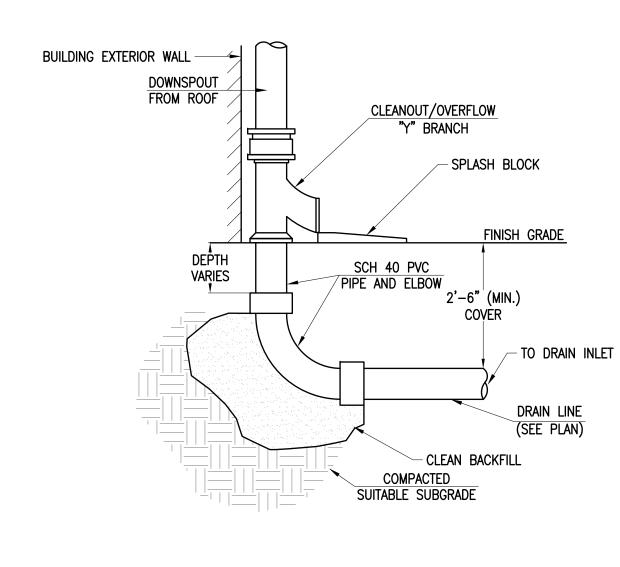


## DOWNSPOUT CONNECTION FROM ROOF

NOT TO SCALE

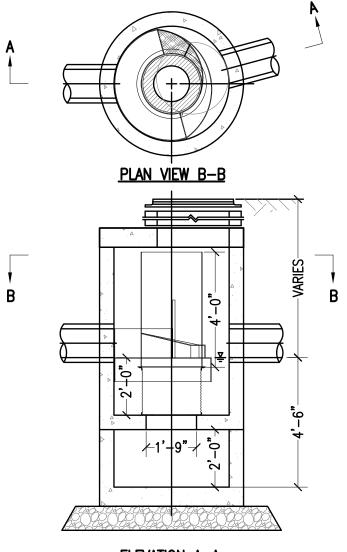

# CONTECH CDS WATER QUALITY UNIT

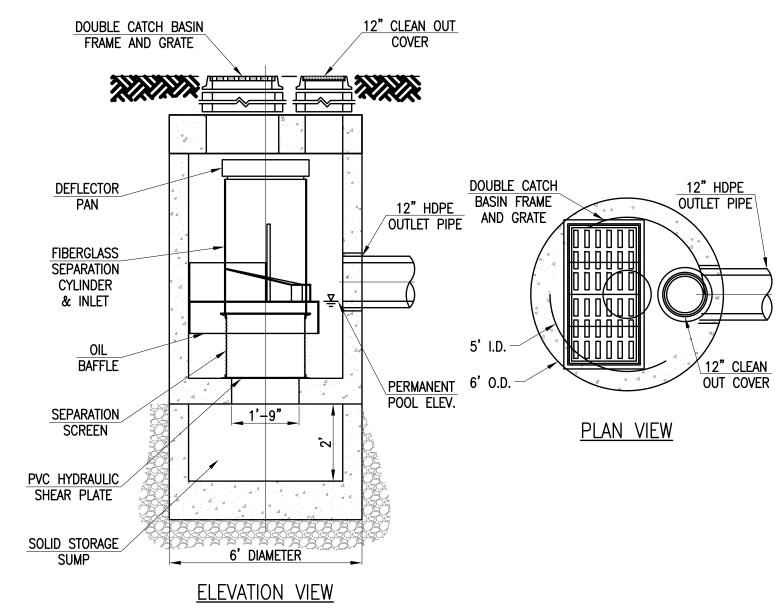

NOT TO SCALE

SQUARE 4'-0"\* OPENING TYP. SNOUT QUINNIND QUINNIND NON-SHRINK GROUT DIA. CATCH BASIN 12" COMPACTED ALTERNATE TOP SLAB (STEEL REINFORCED FOR HS-20 LOADING) **ELEVATION A-A** SUBGRADE HS-20 LOADING) DRAIN MANHOLE CATCH BASIN TRENCH DRAIN DETAIL NOT TO SCALE NOT TO SCALE NOT TO SCALE NOT TO SCALE CULTEC FC48
FEED CONNECTOR 1-2" DOUBLE WASHED CRUSHED STONE 4 OZ. NON-WOVEN FILTER FABRIC AROUND STONE RECHARGER 920HD HEAVY-DUTY CHAMBER FINISHED GRADE ELEV.=80.75 95% COMPACTED FILL \95% COMPACTED FILL ELEV.=79.75 ELEV.=78.75 8" HDPE OUTLET ELEV.=76.75 ELEV.=74.75 ELEV.=74.00 CULTEC NO. 66 WOVEN GEOTEXTILE TO BE PLACED BENEATH INTERNAL MANIFOLD AND INLET PIPES (FOR SCOUR PROTECTION) CULTEC RECHARGER 920HD HEAVY DUTY CROSS SECTION CONTECH CDS2015

No. 47544 CIVIL

**REVISIONS** 

06/28/21 PER PLANNER COMMEN /21 PER DPI COMMENTS

vww.FarlandCorp.con

21 VENTURA DRIVE DARTMOUTH, MA 02747 P.508.717.3479

- ENGINEERING
- SITEWORK LAND SURVEYING
- DEVELOPMENT

DRAWN BY: SC DESIGNED BY: SC

CHECKED BY: CAF 0

0 STREET
7 LOTS 105
MASSACHUSET MA |

SSESSORS MAP 1 NEW BEDFORD,

JUNE 24, 2021 SCALE: AS NOTED JOB NO. 21-253 LATEST REVISION:

DETAILS SHEET 9 OF 9

SEPTEMBER 3, 2021

NOT TO SCALE